

CubiC

DECORATIVE

Jl. Pluit Karang Ayu II
Blok D1S No. 108, Pluit, Penjaringan
Jakarta Utara, Indonesia

andromeda.lighting03@gmail.com
WA: 0895 2239 4123
@: andromeda.lighting



Andromeda lighting is a company engaged in the supplier of light that founded in 2001, focused on improving people's lives through meaningful innovation in the areas of green lighting, especially LED.

Customer satisfaction is the goal for us by delivering updated lighting products, with the latest technology adopted. The simple and stylish designs making excellent mix perfect. Our products are high quality products with standard international such as CE, RoHS, UL Listed.

Our projects are spread across the country, and continue to deliver exceptional results for our customers every step of the way.

OUR BRANDS

CubiC Tons:



CONTENTS

Nyx Surface Series..... 1

Pontus Outdoor Series..... 3

Moia Outdoor Series 5

Vulcan Steplight Series 7

Aether Series 11

Diana Series 13

Aphrodite Linear Light Series 17

Aladna Pendant Series 21

Hala Pendant Series 25

Cylons Series 33


Tarnax Series 35

Lighting Basics

Colour Temperature

The colour temperature of a light source is the temperature of an ideal black-body radiator that radiates light of comparable hue to that of the light source.

The colour temperature of the electromagnetic radiation emitted from an ideal black body is defined as its surface temperature in Kelvin (K).



Colour Rendering Index

A Colour Rendering Index (CRI) is a quantitative measure of the ability of a light source to reveal the colours of various objects faithfully in comparison with an ideal or natural light source. Light sources with a high CRI are desirable in colour-critical applications such as museum display lighting.



Light Source and its CRI

Light Source	GLS	HALOGEN	CFL	FL	CDM	SON	SOX	LED
Color Rendering	100	100	70-90	70-90	70-90	<60	<60	85
Luminous Efficiency (lm/W)	15	25	80	80	90	130	200	90-140
Lifespan (Hours)	1,000	2,000	8,000	10,000	8,000	24,000	15,000	50,000

IP Protection

A two digit number established by the International Electro Technical Commission is used to provide an Ingress Protection rating to a piece of electronic equipment or to an enclosure for electronic equipment.

The larger the value of each digit, the greater the protection.

1st Digit	Ingress of solid objects	2nd Digit	Ingress of liquids
No.	Description	No.	Description
0	No protection	0	No protection
1	Protected against solid objects over 50mm e.g.hands, large tools.	1	Protected against vertically falling drops of water or condensation
2	Protected against solid objects over 12.5mm e.g. hands, large tools.	2	Protected against falling drops of water, if the case is disposed up to 15° from vertical.
3	Protected against solid objects over 2.5mm e.g.wire, small tools.	3	Protected against sprays of water from any direction, even if the case is disposed up to 60° from vertical
4	Protected against solid objects over 1.0mm e.g.wires	4	Protected against splash water from any direction.
5	Limited protection against dust ingress. (no harmful deposit)	5	Protected against low pressure water jets from any direction. Limited ingress permitted.
6	Totally protected against dust ingress.	6	Protected against high pressure water jets from any direction. Limited ingress permitted.
7	N/A	7	Protected against short periods of immersion in water.
8	N/A	8	Protected against long, durable periods of immersion in water.
9	N/A	9	Protected against close-range high pressure, high temperature spray downs.

Nyx

surface series



CCT 2700K 3000K 4000K 5000K

Optional Color:




Black White Gold




NX0440080F1

Power	12W + 6W
Beam Angle	15D / 24D + 120D
CRI	RA>80
Power Supply	36V / 450mA
Cut Out	Surface Mounted




NX0440110F

Power	12W + 6W
Beam Angle	105D + 120D
CRI	>80
Power Supply	36V / 450mA
Cut Out	Surface Mounted



NX0440140F

Power	24W + 6W
Beam Angle	105D + 120D
CRI	>80
Power Supply	36V / 750mA
Cut Out	Surface Mounted



Pontus outdoor series


High Performance

Perfect balance between lighting quality and energy efficiency.

CCT 2700K 3000K 4000K 5000K





Optional Color:




PN0440069FW

Power	3W
Beam Angle	Narrow Beam
CRI	RA>80
Power Supply	3V / 700mA
Cut Out	Wall Mounted




PN0440110F

Power	2x3W
Beam Angle	Narrow Beam
CRI	>80
Power Supply	6V / 700mA
Cut Out	Wall Mounted



PN0440158F

Power	2x5.5W
Beam Angle	120D
CRI	>80
Power Supply	30V / 300mA
Cut Out	Wall Mounted



Moia outdoor series



CCT

2700K

3000K

4000K

5000K


Optional Color:



Black

White


Grey



MO0440955F

Power
Beam Angle
CRI
Power Supply
Cut Out


6W
Narrow Beam
RA>80
9V / 700mA
Wall Mounted



MO0440789F

Power
Beam Angle
CRI
Power Supply
Cut Out


3W
Narrow Beam
RA>80
3V / 700mA
Wall Mounted



MO0440719F


Power
Beam Angle
CRI
Power Supply
Cut Out

2x3W
Narrow Beam
>80
6V / 700mA
Wall Mounted




Vulcan


steplight series

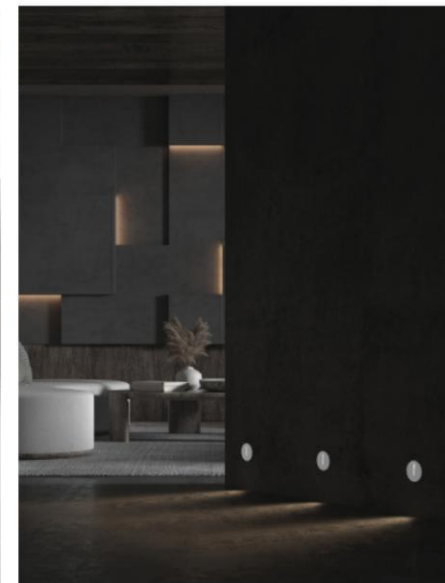



CCT 2700K 3000K 4000K 5000K

Optional Color:





**VL0440126FT2**



Power 3W
 Beam Angle Narrow Beam
 CRI RA>80
 Power Supply 6V / 350mA
 Cut Out 100x50x60

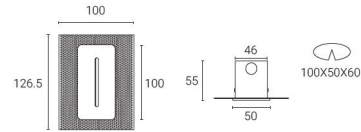**VL051090F2**



Power 3W
 Beam Angle Narrow Beam
 CRI RA>80
 Power Supply -
 Cut Out 80x80x60

**VL0440126FT1**



Power 3W
 Beam Angle Narrow Beam
 CRI RA>80
 Power Supply 3V / 700mA
 Cut Out 100x50x60

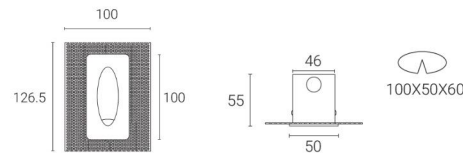**VL051087F**


Power 3W
 Beam Angle Narrow Beam
 CRI RA>80
 Power Supply -
 Cut Out 75x39x60

**VL051090F3**


Power 3W
 Beam Angle Narrow Beam
 CRI >80
 Power Supply -
 Cut Out 75x39x60

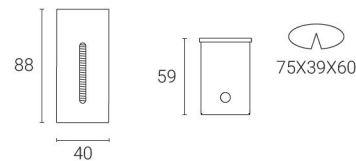**VL051090F1**

Power 3W
 Beam Angle Narrow Beam
 CRI >80
 Power Supply -
 Cut Out 86x86x50

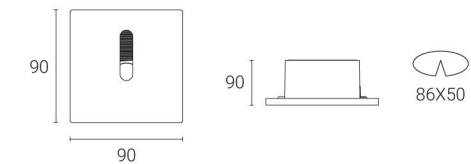

Aether series

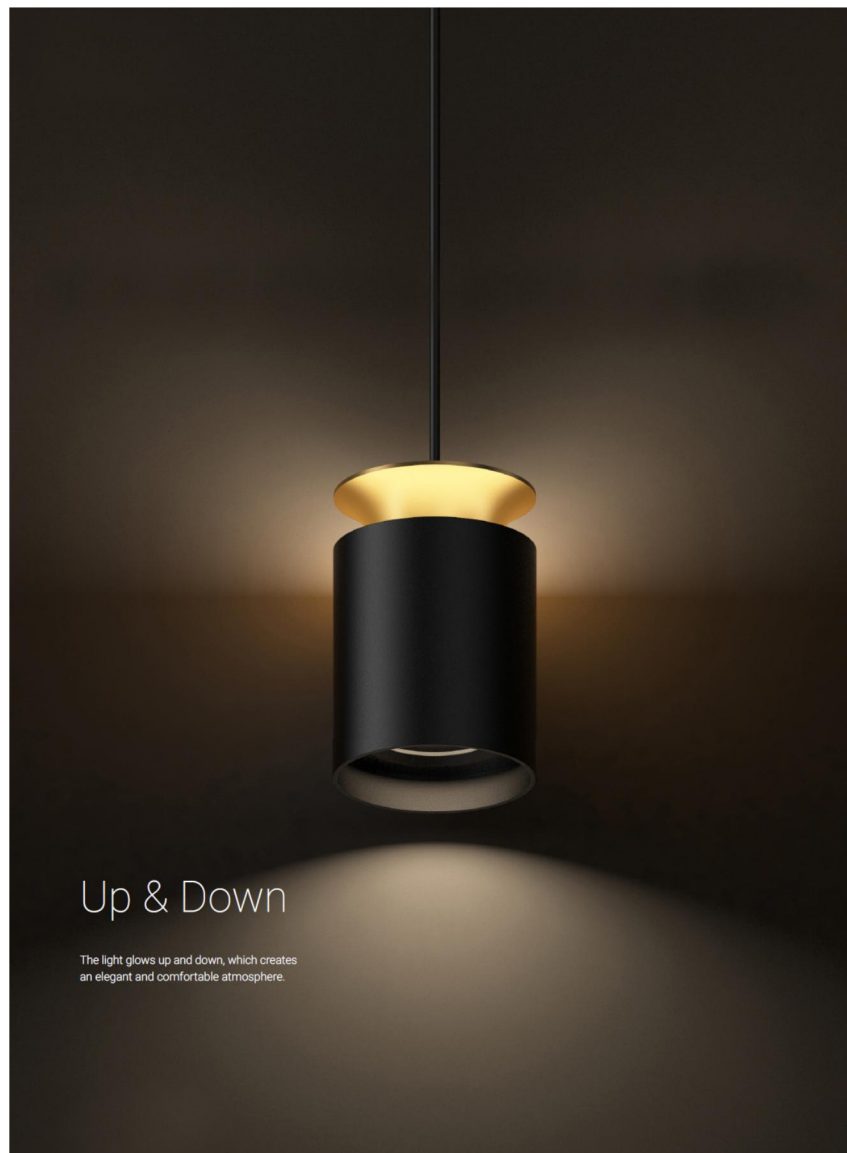

CCT 2700K 3000K 4000K 5000K

Optional Color:



Pendant / Ceiling Light

AE0440080F

Power 12W + 6W
Beam Angle 15D / 24D + 120D
CRI RA>80
Power Supply 36V / 450mA
Cut Out Hoisting




AE0440067F

Power GU10
Beam Angle -
CRI -
Power Supply -
Cut Out Hoisting



AE0440067F

Power GU10
Beam Angle -
CRI -
Power Supply -
Cut Out Surface Mounted



Diana series



CCT 2700K 3000K 4000K 5000K




Optional Color:



CCTSwitching

3000K/4000K/6000K

The function of CCT Switching and the two kinds of options (ceiling and pendant) provides a wide range of versatility for light applications. It can be widely used in various kinds of applications, such as living room, dining room, etc.

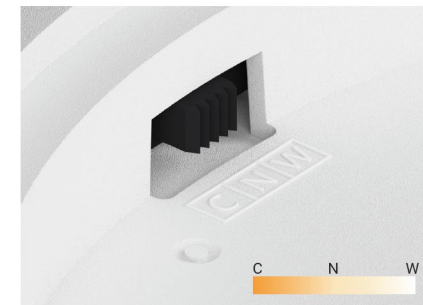



DA043225

Power 18W
Beam Angle 120D
CRI RA>80
Power Supply 220-240VAC / 130mA
Cut Out Surface Mounted




DA043225

Power 18W
Beam Angle 120D
CRI RA>80
Power Supply 220-240VAC / 130mA
Cut Out Hoisting




DA043300

Power 23W
Beam Angle 120D
CRI RA>80
Power Supply 220-240V / 170mA
Cut Out Surface Mounted




DA043300

Power 23W
Beam Angle 120D
CRI RA>80
Power Supply 220-240V / 170mA
Cut Out Hoisting




DA043400

Power 36W
Beam Angle 120D
CRI >80
Power Supply 220-240VAC / 260mA
Cut Out Surface Mounted



DA043400

Power 36W
Beam Angle 120D
CRI >80
Power Supply 220-240VAC / 260mA
Cut Out Hoisting



Aphrodite

linear light series




Optional Color:




Black White

CCT 2700K 3000K 4000K 5000K

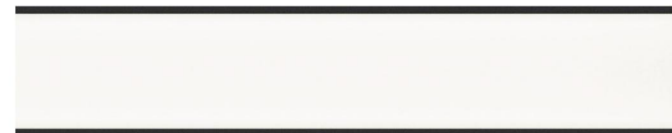

Floodlight type

Floodlight design, high light transmittance, uniform and soft light, comfortable without dazzling.

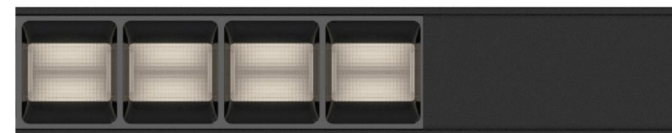

Rectangle Optic

Rectangle lighting speckle create a soft and comfy visual.



Grille Light module

Anti-glare accessories for excellent visual comfort.




LED Lens module+ SMD general lighting module

Two modules in one solution meets various illuminating spaces.




Anti-glare SMD general lighting

The soft and cosy lighting makes visual comfortable.




APH051200FDA

Power 30W
 Beam Angle 120D
 CRI RA>90
 Power Supply 20-33V / 900mA
 Cut Out 95x60





APH051200FDB

Power 30W
 Beam Angle 45D
 CRI RA>90
 Power Supply 20-33V / 900mA
 Cut Out 95x60





051200FDC

Power 30W
 Beam Angle 38x120D
 CRI >90
 Power Supply 20-33V / 900mA
 Cut Out 95x60

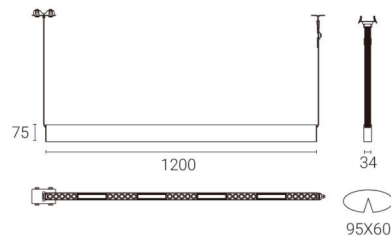


APH051200FDD

Power 30W
 Beam Angle 35Dx70D
 CRI RA>90
 Power Supply 30-50V / 600mA
 Cut Out 95x60



APH051200FDE

Power 30W
 Beam Angle 120D
 CRI RA>90
 Power Supply 24-40V / 750mA
 Cut Out 95x60

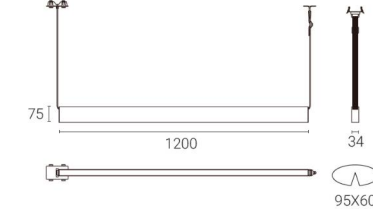

Aladna pendant series



CCT 2700K 3000K 4000K 5000K



Color Options:

○ White ● Black ● Gold




**AL01062L**


Power 7W
Beam Angle 15D / 24D / 36D
CRI RA>90+
CCT 2700K / 3000K / 4000K /
 Tuneable White 2700K-5700K

**AL01281L-P**



Power 7W
Beam Angle 15D / 24D / 36D
CRI RA>90+
CCT 2700K / 3000K / 4000K /
 Tuneable White 2700K-5700K

**AL01130L**


Power 7W
Beam Angle 15D / 24D / 36D
CRI RA>90+
CCT 2700K / 3000K / 4000K /
 Tuneable White 2700K-5700K

**AL01281L-H**


Power 7W
Beam Angle 15D / 24D / 36D
CRI RA>90+
CCT 2700K / 3000K / 4000K /
 Tuneable White 2700K-5700K

**AL01400L**

Power 7W
Beam Angle 15D / 24D / 36D
CRI RA>90+
CCT 2700K / 3000K / 4000K /
 Tuneable White 2700K-5700K

**AL01300L**

Power 7W
Beam Angle 15D / 24D / 36D
CRI RA>90+
CCT 2700K / 3000K / 4000K /
 Tuneable White 2700K-5700K



Hala

pendant series

6 heads chandelier with two functions - spotlight (accent lighting) / suspension light (general lighting)

DECOR & FUNCTION


This version allows the diversity of product application.
It's a perfect embodiment of the combination of decorative lighting and functional lighting.



CCT 2700K 3000K 4000K 5000K


Color Options:

○ White ● Black ● Gold




HL02650A

Power 25W
Beam Angle 15D / 24D / 36D
CRI RA>90+
CCT 2700K / 3000K / 4000K /
Tuneable White 2700K-5700K

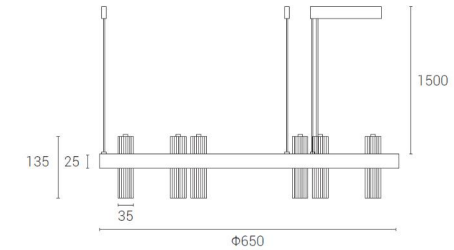

HL02650F

Power 25W
Beam Angle 15D / 24D / 36D
CRI RA>90+
CCT 2700K / 3000K / 4000K /
Tuneable White 2700K-5700K

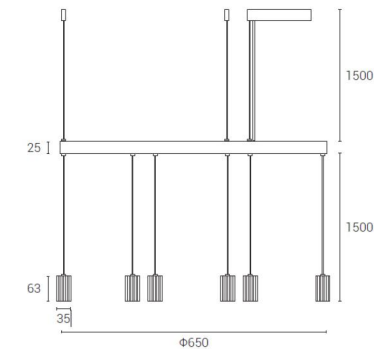



RHYTHM


The height of the lamp can be adjusted freely to produce rhythmic light and shadow.

CCT 2700K 3000K 4000K 5000K




Color Options:

○ White ● Black ● Gold




HL021200A

Power 35W
 Beam Angle 15D / 24D / 36D
 CRI RA>90+
 CCT 2700K / 3000K / 4000K /
 Tuneable White 2700K-5700K

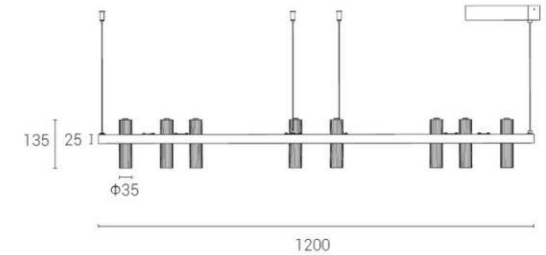


HL021200F

Power 35W
 Beam Angle 15D / 24D / 36D
 CRI RA>90+
 CCT 2700K / 3000K / 4000K /
 Tuneable White 2700K-5700K

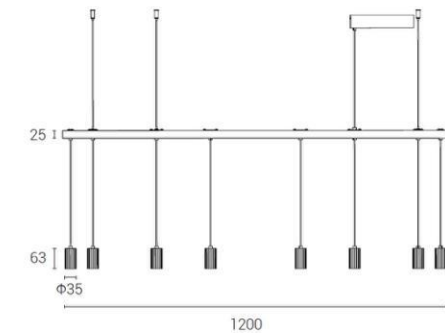





HL0271000R

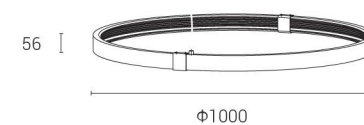


HL0271500R

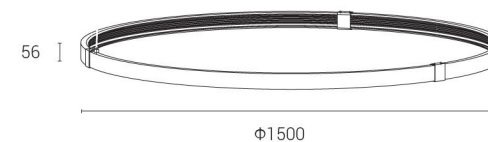


HL0272000R

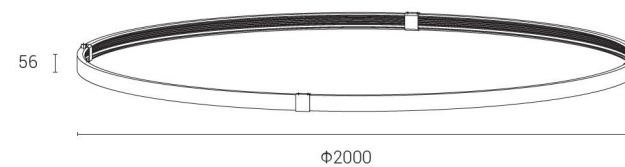


**HL03035D**


Power	5W
Beam Angle	15D / 24D / 36D
CRI	RA>90+
CCT	2700K / 3000K / 4000K / Tuneable White 2700K-5700K

**HL03035L**


Power	7W
Beam Angle	15D / 24D / 36D
CRI	RA>90+
CCT	2700K / 3000K / 4000K / Tuneable White 2700K-5700K

**HL03045D**


Power	9W
Beam Angle	15D / 24D / 36D
CRI	RA>90+
CCT	2700K / 3000K / 4000K / Tuneable White 2700K-5700K

**HL03045L**

Power	10W
Beam Angle	15D / 24D / 36D
CRI	RA>90+
CCT	2700K / 3000K / 4000K / Tuneable White 2700K-5700K

**HL03060D**

Power	12W
Beam Angle	15D / 24D / 36D
CRI	RA>90+
CCT	2700K / 3000K / 4000K / Tuneable White 2700K-5700K

**HL03060L**

Power	13W
Beam Angle	15D / 24D / 36D
CRI	RA>90+
CCT	2700K / 3000K / 4000K / Tuneable White 2700K-5700K

Cylons series

Cylons series in 3 versions:
ceiling surface mounting, ceiling track mounting
and wall mounting meet all kinds of application requirement.

CCT 2700K 3000K 4000K 5000K


Color Options:

○ White ● Black ● Gold




CY02035A

Power 8W
Beam Angle 15D / 24D / 36D
CRI RA>90+
CCT 2700K / 3000K / 4000K




CY02035A / CY02135A

Power 8W / 2*8W
Beam Angle 15D / 24D / 36D
CRI RA>90+
CCT 2700K / 3000K / 4000K

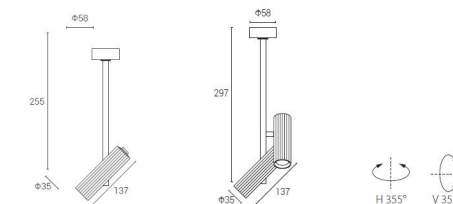

CY02035A

Power 8W
Beam Angle 15D / 24D / 36D
CRI RA>90+
CCT 2700K / 3000K / 4000K



Tarnax

standing lamp series



CCT 2700K 3000K 4000K 5000K



Color Options:

○ White ● Black ● Gold

READING LIGHT


3 styles are available, suitable for different decoration styles.






TX02045L

Power 15W
Beam Angle 15D / 24D / 36D
CRI RA>90+
CCT 2700K / 3000K / 4000K




TX02145L

Power 15W
Beam Angle 15D / 24D / 36D
CRI RA>90+
CCT 2700K / 3000K / 4000K




TX02135L

Power 10W
Beam Angle 15D / 24D / 36D
CRI RA>90+
CCT 2700K / 3000K / 4000K




TX02060T

Power 10W
Beam Angle 15D / 24D / 36D / 15~36D
CRI RA>90+
CCT 2700K / 3000K / 4000K



TX02035T

Power 10W
Beam Angle 15D / 24D / 36D
CRI RA>90+
CCT 2700K / 3000K / 4000K



TX02135T

Power 10W
Beam Angle 15D / 24D / 36D
CRI RA>90+
CCT 2700K / 3000K / 4000K

