

CubiC

INDOOR

Jl. Pluit Karang Ayu II
Blok D1S No. 108, Pluit, Penjaringan
Jakarta Utara, Indonesia

andromeda.lighting03@gmail.com
WA: 0895 2239 4123
@: andromeda.lighting



Andromeda lighting is a company engaged in the supplier of light that founded in 2001, focused on improving people's lives through meaningful innovation in the areas of green lighting, especially LED.

Customer satisfaction is the goal for us by delivering updated lighting products, with the latest technology adopted. The simple and stylish designs making excellent mix perfect. Our products are high quality products with standard international such as CE, RoHS, UL Listed.

Our projects are spread across the country, and continue to deliver exceptional results for our customers every step of the way.

OUR BRANDS

CubiC Tons:



CONTENTS

Steplight Indoor 1

Ceiling Downlight 3

- Tons DW Series - Ares downlight Series

- Acher Series - Dome Series

- Carnis Series - Kylos Series

- Zeus Series - Brio Series

- Orcus Series - Polaris Series

- Toby Series - Zuras Series

Mini Downlight 39

- Dota Series - Lynx Series

- Lico Series - Mini Theo

- Odin Series

Laser Blade Series49

- Arash Series - Laser Blade Series

- Arctus Series

Gimbal Adjustable..... 65

General Downlight.....69

- Tango Series

- Tons DG-E Series

Ceiling Mounted..... 73

- Lila Series - Mystic Series

- Stelo Series

Track Light.....83

- Nola Zoom Series - Cube Series

- Nordia Series - Magtrack Series

- Track Magnetic Low Voltage

Linear Light..... 103

- Flux Linear - Flux Linear Underwater

- Flux Linear COB - Neon Flex Linear

Lighting Basics

Colour Temperature

The colour temperature of a light source is the temperature of an ideal black-body radiator that radiates light of comparable hue to that of the light source.

The colour temperature of the electromagnetic radiation emitted from an ideal black body is defined as its surface temperature in Kelvin (K).



Colour Rendering Index

A Colour Rendering Index (CRI) is a quantitative measure of the ability of a light source to reveal the colours of various objects faithfully in comparison with an ideal or natural light source. Light sources with a high CRI are desirable in colour-critical applications such as museum display lighting.



Light Source and its CRI

Light Source	GLS	HALOGEN	CFL	FL	CDM	SON	SOX	LED
Color Rendering	100	100	70-90	70-90	70-90	<60	<60	85
Luminous Efficiency (lm/W)	15	25	80	80	90	130	200	90-140
Lifespan (Hours)	1,000	2,000	8,000	10,000	8,000	24,000	15,000	50,000

IP Protection


A two digit number established by the International Electro Technical Commission is used to provide an Ingress Protection rating to a piece of electronic equipment or to an enclosure for electronic equipment.

The larger the value of each digit, the greater the protection.

1st Digit	Ingress of solid objects	2nd Digit	Ingress of liquids
No.	Description	No.	Description
0	No protection	0	No protection
1	Protected against solid objects over 50mm e.g.hands, large tools.	1	Protected against vertically falling drops of water or condensation
2	Protected against solid objects over 12.5mm e.g. hands, large tools.	2	Protected against falling drops of water, if the case is disposed up to 15° from vertical.
3	Protected against solid objects over 2.5mm e.g.wire, small tools.	3	Protected against sprays of water from any direction, even if the case is disposed up to 60° from vertical
4	Protected against solid objects over 1.0mm e.g.wires	4	Protected against splash water from any direction.
5	Limited protection against dust ingress. (no harmful deposit)	5	Protected against low pressure water jets from any direction. Limited ingress permitted.
6	Totally protected against dust ingress.	6	Protected against high pressure water jets from any direction. Limited ingress permitted.
7	N/A	7	Protected against short periods of immersion in water.
8	N/A	8	Protected against long, durable periods of immersion in water.
9	N/A	9	Protected against close-range high pressure, high temperature spray downs.


STEPLIGHT

indoor series

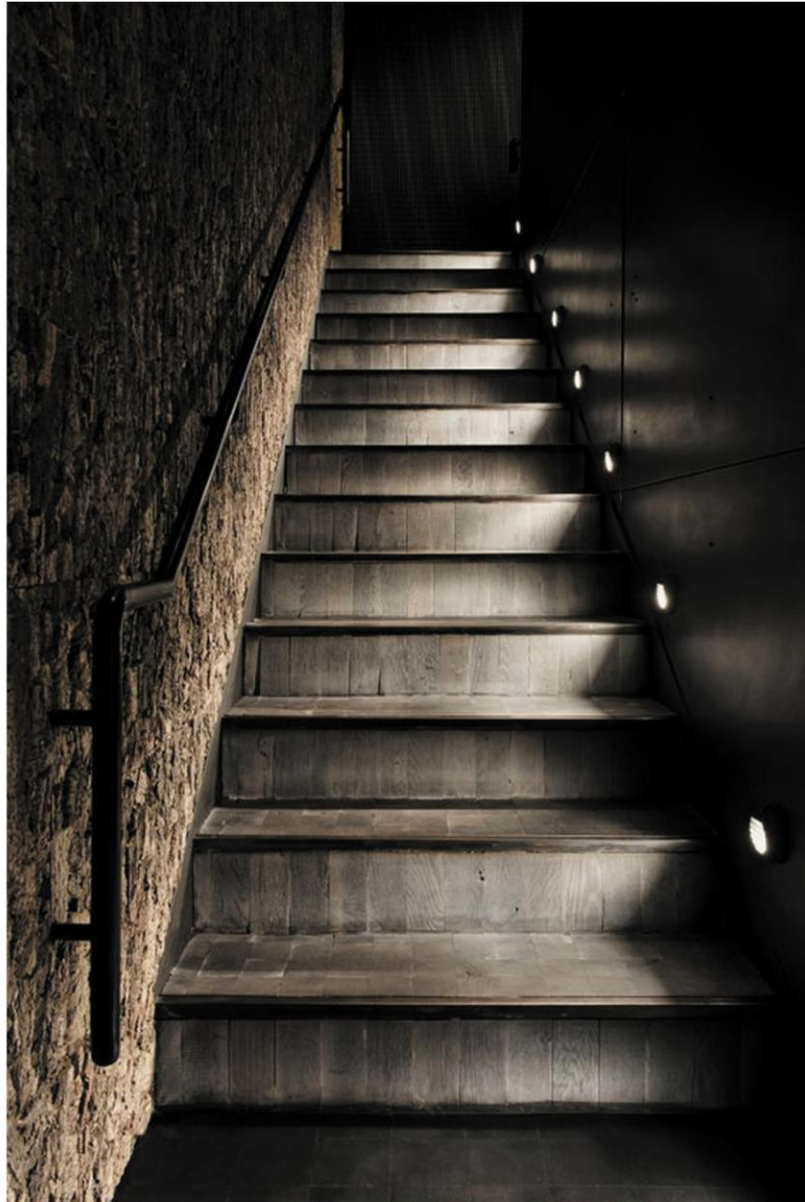



LDL-C01

Power	1.2W (350mA)
Beam Angle	100D
CCT	3000K / 4000K
CRI	RA>90
Power Supply	AC100-240V
Cut Out	77*77mm




LDL-E01

Power	1.2W (350mA)
Beam Angle	80D
CCT	3000K / 4000K
CRI	RA>90
Power Supply	AC100-240V
Cut Out	77*77mm



LDL-E02

Power	3W (350mA)
Beam Angle	80D
CCT	3000K / 4000K
CRI	RA>80
Power Supply	AC100-240V / DC700mA
Cut Out	70*70mm

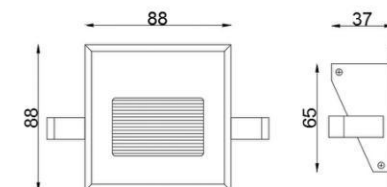

TONS: DG series

Features & Application



- ◆ IP54 on the front, very easy for end-user to clean the surface.
- ◆ Transparent glass to protect the CoB chip.
- ◆ Different angle reflectors for customer to choose in different applications.
- ◆ Eco-friendly technology of CoB with energy saving and low maintenance cost.
- ◆ Good thermal management guarantees long lifespan.
- ◆ Deep front frame provide big cut-off angle to create visual comfort.
- ◆ Easy to install with two springs.

Accessories





DG-090C

Power 13W (1500lm)
Beam Angle 15D / 24D / 36D / 50D
CCT 2700K / 3000K / 3500K / 4000K
IP Rated IP54
Cut Out 90mm

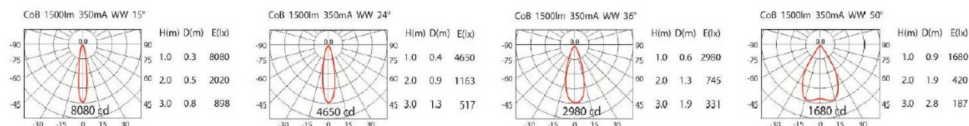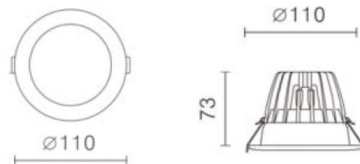



DG-125C

Power 25W (3400lm)
Beam Angle 10D / 20D / 40D / 70D
CCT 2700K / 3000K / 3500K / 4000K
IP Rated IP54
Cut Out 125mm

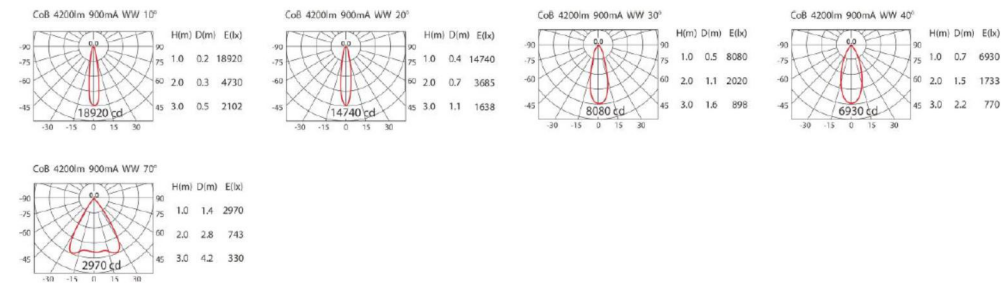

DG-150C

Power 52W (6200lm)
Beam Angle 12D / 20D / 40D / 70D
CCT 2700K / 3000K / 3500K / 4000K
IP Rated IP54
Cut Out 150mm

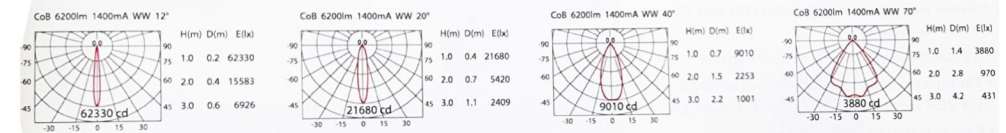

Ares downlight series



White Grey Wine Black

Self-contained LED engine in four colors with industrial design.

Special characteristics:



High Efficiency



No Radiation



Suitable for
Low Distance



High CRI
RA>90




Anti Glare



IP 20 / IP 65

Modular Design

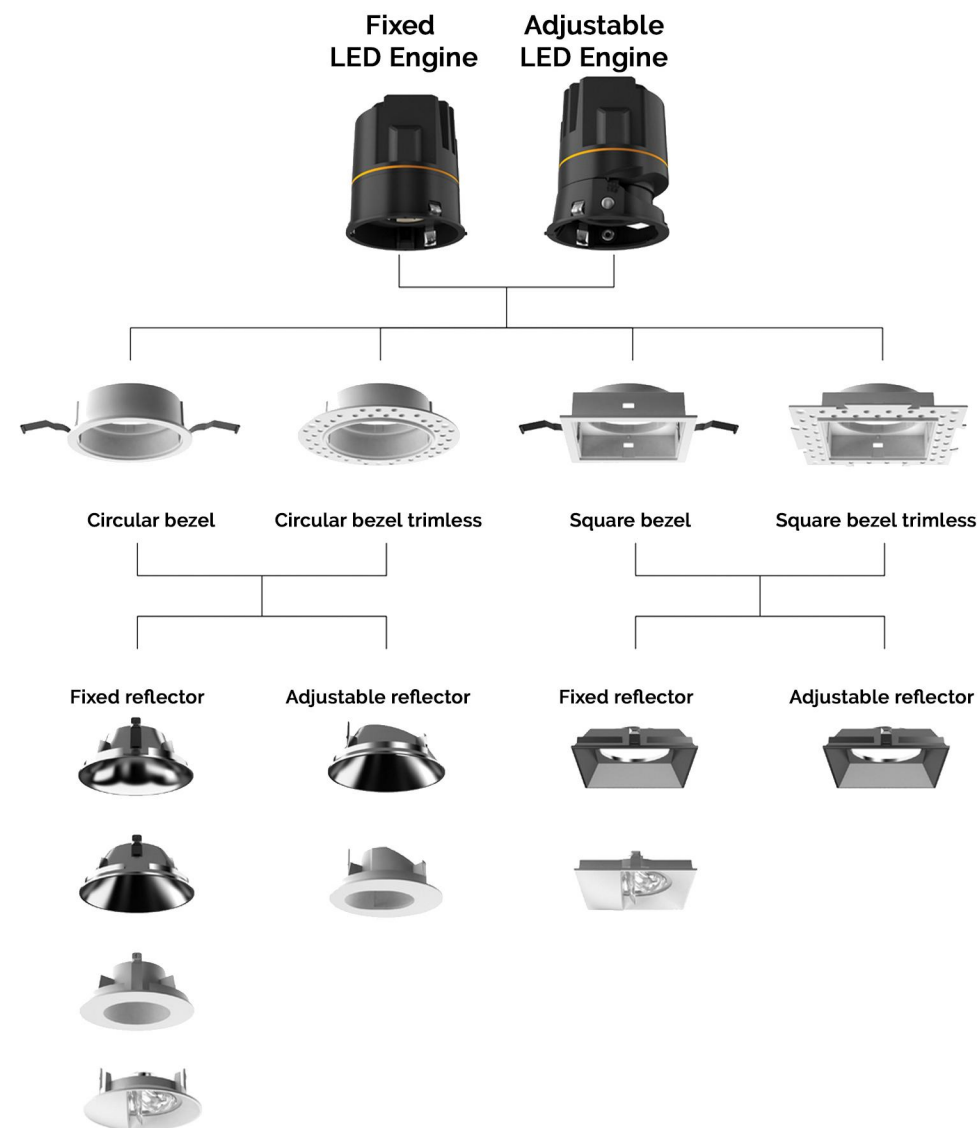

Reflector in Different Color



Chrome



Silver



White



Black



Gold




Orange-Red




Light Grey

**AR01075F**


Power 9W (630lm) / 12W (840lm)
 Beam Angle 15D / 24D / 36D / 50D
 CRI RA>90
 Power Supply 36-40V / 200mA / 280mA
 Cut Out D75mm

**AR01075A**


Power 9W (630lm) / 12W (840lm)
 Beam Angle 15D / 24D / 36D / 50D
 CRI RA>90
 Power Supply 36-40V / 200mA / 280mA
 Cut Out D75mm

**AR05105F**


Power 20W (1500lm) / 25W (2000lm)
 Beam Angle 15D / 24D / 36D / 50D
 CRI RA>90
 Power Supply 36-40V / 500mA / 600mA
 Cut Out D105mm

**AR05105A**


Power 20W (1500lm) / 25W (2000lm)
 Beam Angle 15D / 24D / 36D / 50D
 CRI RA>90
 Power Supply 36-40V / 500mA / 600mA
 Cut Out D105mm

**AR06150F**

Power 35W (2975lm) / 40W (3200lm)
 Beam Angle 15D / 24D / 36D / 50D
 CRI RA>90
 Power Supply 36-40V / 800mA / 1050mA
 Cut Out D150mm


**AR06150A**

Power 35W (2975lm) / 40W (3200lm)
 Beam Angle 15D / 24D / 36D / 50D
 CRI RA>90
 Power Supply 36-40V / 800mA / 1050mA
 Cut Out D150mm




**AR01075W**



Power 12W (900lm)
 Beam Angle Wallwasher
 CRI RA>90
 Power Supply 36-40V / 280mA
 Cut Out D75mm

**AR01075AT**



Power 9W (630lm) / 12W (840lm)
 Beam Angle 15D / 24D / 36D / 50D
 CRI RA>90
 Power Supply 36-40V / 200mA / 280mA
 Cut Out D75mm

**AR01075WT**



Power 12W (900lm)
 Beam Angle Wallwasher
 CRI RA>90
 Power Supply 36-40V / 280mA
 Cut Out D75mm

**AR01075AST**


Power 9W (630lm) / 12W (840lm)
 Beam Angle 15D / 24D / 36D / 50D
 CRI RA>90
 Power Supply 36-40V / 200mA / 280mA
 Cut Out 75x75mm

**AR01075FS**

Power 9W (630lm) / 12W (840lm)
 Beam Angle 15D / 24D / 36D / 50D
 CRI RA>90
 Power Supply 36-40V / 200mA / 280mA
 Cut Out 75x75mm

**AR01075AS**

Power 9W (630lm) / 12W (840lm)
 Beam Angle 15D / 24D / 36D / 50D
 CRI RA>90
 Power Supply 36-40V / 200mA / 280mA
 Cut Out 75x75mm



ACHER series

The design highlight of this series is the perfect combination of:

- Compact size and high luminous efficiency up to 95lm/W.
- Special curved heat sink design, this spotlight series adapts to false ceilings that have limited height (less than 10cm).

[CCT] 2700K 3000K 4000K



Optional Color



White Black


ACCESSORY




Honey comb



ACH04035F



ACH04045A




ACH04035F

ACH04045A


Power	5W (425lm)
Beam Angle	17D / 36D
CRI	RA>90
Power Supply	36-40V / 120mA
Cut Out	D35mm D45mm



ACH04055F



ACH04065A




ACH04055F

ACH04065A


Power	15W (1500lm)
Beam Angle	18D / 24D / 36D
CRI	RA>90
Power Supply	36-40V / 350mA
Cut Out	D55mm D65mm




ACH04035FH




ACH04055FH



ACH04070FSZ



ACH04070FSX



ACH04035FH

Power	5W (425lm)
Beam Angle	17D / 36D
CRI	RA>90
Power Supply	36-40V / 120mA
Cut Out	D35mm

ACH04055FH

Power	15W (1500lm)
Beam Angle	18D / 24D / 36D
CRI	RA>90
Power Supply	36-40V / 350mA
Cut Out	D55mm


ACH04070FSZ

Power	15W (1500lm)
Beam Angle	18D / 24D / 36D
CRI	RA>90
Power Supply	36-40V / 350mA
Cut Out	70x70mm


ACH04070FSX




ACH04045FX



ACH04080AX



ACH04080ASX



ACH04045FX

Power	7W (560lm)
Beam Angle	17D / 36D
CRI	RA>90
Power Supply	36-40V / 150mA
Cut Out	D45mm

ACH04080AX

Power	15W (1500lm)
Beam Angle	18D / 24D / 36D
CRI	RA>90
Power Supply	36-40V / 350mA
Cut Out	D80mm

ACH04080ASX

Power	15W (1500lm)
Beam Angle	18D / 24D / 36D
CRI	RA>90
Power Supply	36-40V / 350mA
Cut Out	80x80mm

Efficient
cooling for
extended
lifetime

High
Performance

Perfect balance between lighting quality and
energy efficiency.

DOME series

Optional Color:



W+W

W+B

W+G

B+B

B+G

CCT

2700K


3000K

4000K

IP₂₀


DM05050F1

Power	7W (490lm)
Beam Angle	15D / 24D / 36D
CRI	RA>90
Power Supply	36-40V / 160mA
Cut Out	D50mm

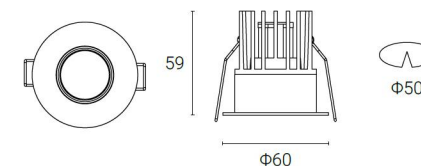


DM0270065F2

Power	12W (780lm)
Beam Angle	15D / 24D / 36D / 50D
CRI	RA>90
Power Supply	36-40V / 300mA
Cut Out	D65mm

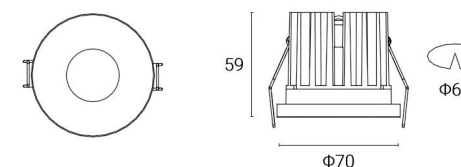


DM0270065F1

Power	12W (780lm)
Beam Angle	15D / 24D / 36D / 50D
CRI	RA>90
Power Supply	36-40V / 300mA
Cut Out	D65mm

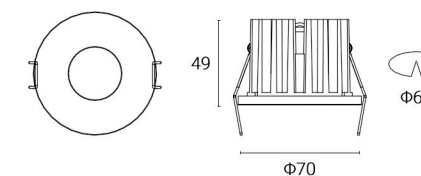


**DM0270075F**


Power 12W (780lm)
 Beam Angle 15D / 24D / 36D / 50D
 CRI RA>90
 Power Supply 36-40V / 300mA
 Cut Out D75mm

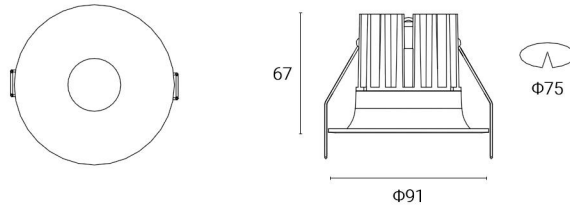**DM0270075A**


Power 12W (780lm)
 Beam Angle 15D / 24D / 36D / 50D
 CRI RA>90
 Power Supply 36-40V / 300mA
 Cut Out D75mm

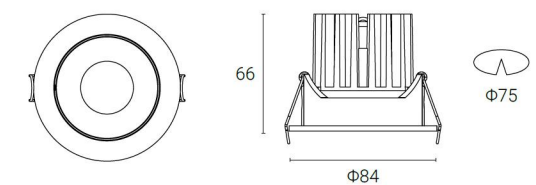**DM0270078F**


Power 12W (780lm)
 Beam Angle 15D / 24D / 36D / 50D
 CRI RA>90
 Power Supply 36-40V / 300mA
 Cut Out D78mm

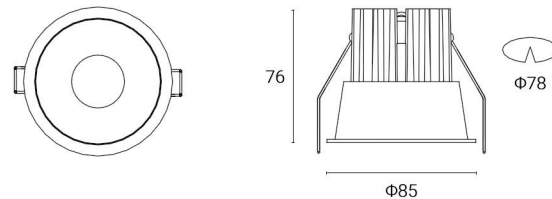**DM0270075A1**


Power 12W (780lm)
 Beam Angle 15D / 24D / 36D / 50D
 CRI RA>90
 Power Supply 36-40V / 300mA
 Cut Out D75mm

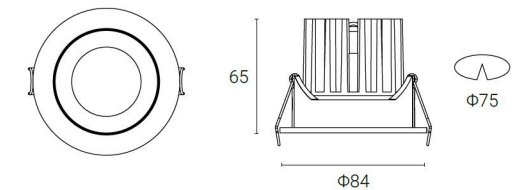**DM0270078FS**

Power 12W (780lm)
 Beam Angle 15D / 24D / 36D / 50D
 CRI RA>90
 Power Supply 36-40V / 300mA
 Cut Out D78mm

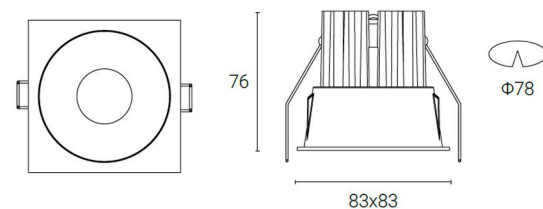
**DM0270075AS**

Power 12W (780lm)
 Beam Angle 15D / 24D / 36D / 50D
 CRI RA>90
 Power Supply 36-40V / 300mA
 Cut Out D75mm

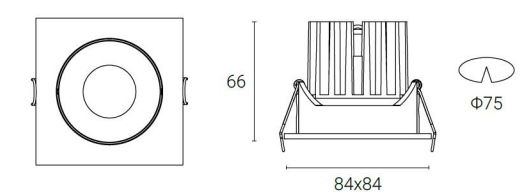


**DM0270075AS1**


Power 12W (780lm)
 Beam Angle 15D / 24D / 36D / 50D
 CRI RA>90
 Power Supply 36-40V / 300mA
 Cut Out D75mm

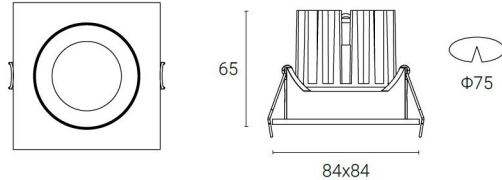**DM0270095AS**



Power 12W (780lm)
 Beam Angle 15D / 24D / 36D / 50D
 CRI RA>90
 Power Supply 36-40V / 300mA
 Cut Out D95mm

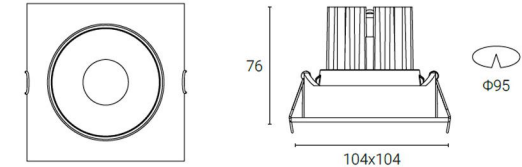**DM0270160AS**


Power 2x12W (2x780lm)
 Beam Angle 15D / 24D / 36D / 50D
 CRI RA>90
 Power Supply 36-40V / 300mA
 Cut Out 75x160mm

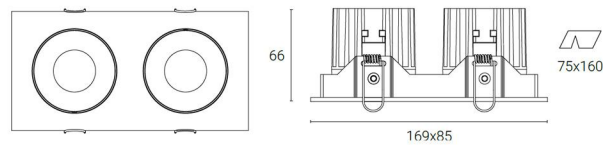**DM0270200AS**


Power 2x12W (2x780lm)
 Beam Angle 15D / 24D / 36D / 50D
 CRI RA>90
 Power Supply 36-40V / 300mA
 Cut Out 95x200mm

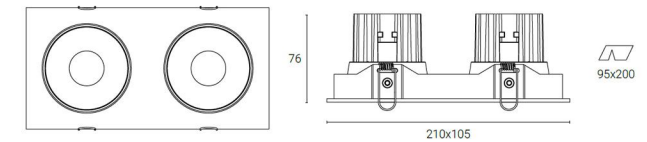**DM0270160AS1**

Power 2x12W (2x780lm)
 Beam Angle 15D / 24D / 36D / 50D
 CRI RA>90
 Power Supply 36-40V / 300mA
 Cut Out 75x160mm

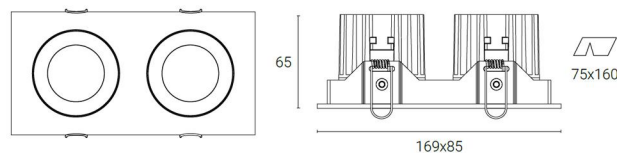**DM0270095A**

Power 12W (780lm)
 Beam Angle 15D / 24D / 36D / 50D
 CRI RA>90
 Power Supply 36-40V / 300mA
 Cut Out D95mm

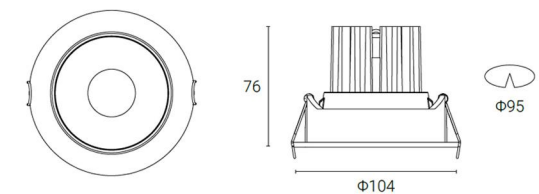



CARNIS series


- Material made of high performance aluminum.
- IP65 construction suits for various environments.
- Three kinds of design: flat trim / curve trim / bevel trim.

[CCT] 2700K 3000K 4000K




CAR01070F-N

Power 12W (1020lm)
 Beam Angle 15D / 24D / 36D / 60D
 CRI RA>90
 Power Supply 36-40V / 300mA
 Cut Out D70mm

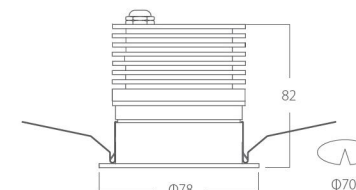


CAR01070F-T

Power 12W (960lm)
 Beam Angle 15D / 24D / 36D / 60D
 CRI RA>90
 Power Supply 36-40V / 300mA
 Cut Out D70mm

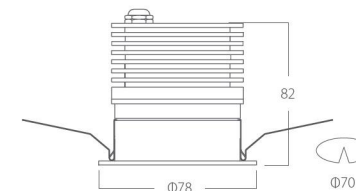

CAR01070F-W

Power 12W (1020lm)
 Beam Angle 15D / 24D / 36D / 60D
 CRI RA>90
 Power Supply 36-40V / 300mA
 Cut Out D70mm

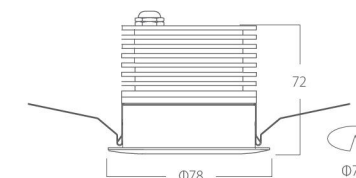

KYLOS series



MULTIPLE CHOICE

- There are four kinds of trim design- round trim, pin hole trim, elliptical hole trim and square trim. The consideration of multiple options of trim allows more choices.

[CCT] 2700K 3000K 4000K



Optional Color




White




KY0180A

Power	9W (495lm) / 12W (660lm)
Beam Angle	15D / 24D / 36D
CRI	RA>90
Power Supply	36-40V / 200mA / 300mA
Cut Out	D75mm




KY0380A

Power	9W (495lm) / 12W (660lm)
Beam Angle	15D / 24D / 36D
CRI	RA>90
Power Supply	36-40V / 200mA / 300mA
Cut Out	D75mm



KY0480F

Power	9W (495lm) / 12W (660lm)
Beam Angle	15D / 24D / 36D
CRI	RA>90
Power Supply	36-40V / 200mA / 300mA
Cut Out	D75mm





ZEUS series

- Special curve trim design makes its unique.
- High performance heat dissipator ensures the LED light source works in a longer lifetime.

[CCT] 2700K 3000K 4000K



Optional Color




White




ZS13070A

Power	10W (800lm)
Beam Angle	15D / 24D / 36D
CRI	RA>90
Power Supply	36-40V / 250mA
Cut Out	D70mm




ZS13095A

Power	18W (1440lm)
Beam Angle	15D / 24D / 36D
CRI	RA>90
Power Supply	36-40V / 450mA
Cut Out	D95mm

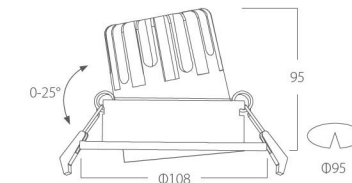


ZS13125A

Power	30W (2400lm)
Beam Angle	15D / 24D / 36D
CRI	RA>90
Power Supply	36-40V / 700mA
Cut Out	D125mm

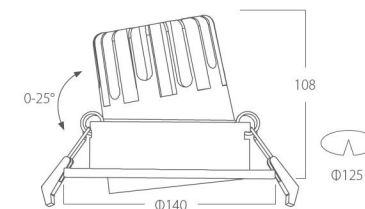


BRIO

downlight series

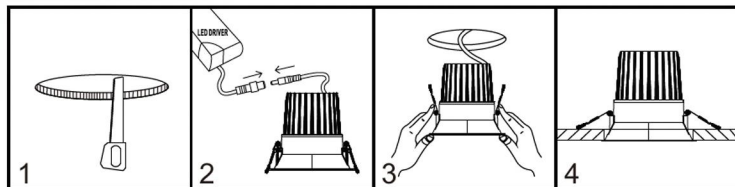

BRIO 5W

Power	5W (350lm)
Beam Angle	15D / 24D / 38D
CRI	RA>80
Power Supply	135mA
Cut Out	D55mm
IP Rated	IP20

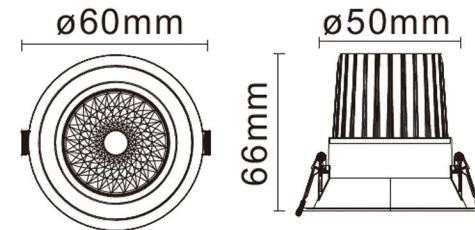


5W | 15°



BRIO 7W

Power	7W (550lm)
Beam Angle	15D / 24D / 38D
CRI	RA>80
Power Supply	180mA
Cut Out	D75mm
IP Rated	IP20

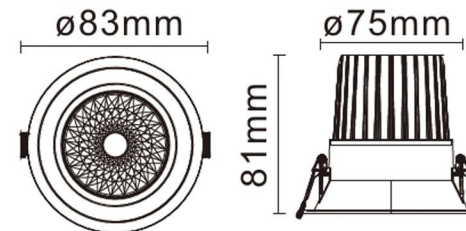

7W | 38°

ORCUS series



Dimmable



IP44




Easy
Installation




AC-IN

Honey Comb(HC)

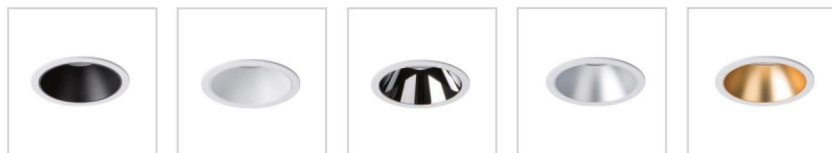


ORCUS 30

Power	5W (370lm) / 7W (518lm)
Beam Angle	15D / 24D / 36D / 48D / 55D
CRI	RA>90 / RA>95
Dimension	D34xH75mm / D34xH100mm
Cut Out	D30mm
IP Rated	IP20 / IP44




ORCUS 50 AJ

Power	12W (936lm)
Beam Angle	15D / 24D / 36D / 48D / 55D
CRI	RA>90 / RA>95
Dimension	D54xH105mm
Cut Out	D50mm
IP Rated	IP20 / IP44



ORCUS 68 TRIMLESS

Power	15W (1125lm)
Beam Angle	15D / 24D / 36D / 48D / 55D
CRI	RA>90 / RA>95
Dimension	106xD64xH99mm
Cut Out	D68mm
IP Rated	IP20 / IP44





POLARIS downlight series

Professional hotel lighting, really super quality and soft lighting efficiency
UGR <16, High color rendering index.





POLARIS FIX

Power	6W (350lm) / 12W (720lm)
Beam Angle	15D / 24D / 36D
CCT	2700K / 3000K / 4000K
CRI	RA>95
Power Supply	150mA
Cut Out	D55mm / D80mm
IP Rated	IP20



POLARIS ADJUSTABLE

Power	6W (350lm) / 12W (720lm)
Beam Angle	15D / 24D / 36D
CCT	2700K / 3000K / 4000K
CRI	RA>95
Power Supply	150mA
Cut Out	D55mm / D80mm
IP Rated	IP20





TOBY

downlight series



DESIGN

Architectural grade regressed square aperture down lights, featuring either a straight or 30° fixed angle tapered baffle and a frosted diffuser to harmonize the aesthetic and visual performance.



GREAT LIGHT OUTPUT

Excellent and lower UGR , clear light shadow



RA

High CRI up to 97




RELIABLE

Branded component ensure the lighting have reliable quality.




TOBY 7W

Power	7W (840lm)
Beam Angle	15D / 24D / 38D / 60D
CCT	2700K / 3000K / 3500K / 4000K
CRI	RA>90
Cut Out	D55mm
IP Rated	IP20




TOBY 15W

Power	15W (1800lm)
Beam Angle	15D / 24D / 38D / 60D
CCT	2700K / 3000K / 3500K / 4000K
CRI	RA>90
Cut Out	D75mm
IP Rated	IP20



TOBY 25W

Power	25W (3000lm)
Beam Angle	15D / 24D / 38D / 60D
CCT	2700K / 3000K / 3500K / 4000K
CRI	RA>90
Cut Out	D79mm
IP Rated	IP20



ZURAS series

Zuras is a spotlight which can use as the downlight for direct lighting or pull out the lighting for spot light, no limitation for ceiling, granting a complete rotation and creating accent or wide lighting.

 **WIDELY ROTATION**
355°turning range , 180°swivel range

 **FLEXIBLE INSTALLATION**
with 5 different size of the cutting hole, 65mm, 75mm, 90mm,120mm ,140mm

 **RA**
High CRI up to 97


 **FLEXIBLE INSTALLATION**
with 2 different size of the cutting hole 75mm, 95mm.




ZR18007A

Power
Beam Angle
CRI
Cut Out
IP Rated


7W (840lm)
15D / 24D / 38D
RA>90
D65mm
IP20



24°-3000K-CRI90




36°-3000K-CRI90




ZR18007A

Power
Beam Angle
CRI
Cut Out
IP Rated


10W (1200lm)
15D / 24D / 38D
RA>90
D75mm
IP20



24°-3000K-CRI90



36°-3000K-CRI90







ZR18015A

Power
Beam Angle
CRI
Cut Out
IP Rated


15W (1800lm)
15D / 24D / 38D
RA>90
D90mm
IP20



24°-3000K-CRI90




36°-3000K-CRI90




ZR18007AS

Power
Beam Angle
CRI
Cut Out
IP Rated


7W (840lm)
15D / 24D / 38D
RA>90
D65mm
IP20



24°-3000K-CRI90




36°-3000K-CRI90




ZR18025A

Power
Beam Angle
CRI
Cut Out
IP Rated



25W (3000lm)
15D / 24D / 38D
RA>90
D120mm
IP20



24°-3000K-CRI90




36°-3000K-CRI90




ZR180207AS

Power
Beam Angle
CRI
Cut Out
IP Rated


2x7W (2x840lm)
15D / 24D / 38D
RA>90
65x120mm
IP20



24°-3000K-CRI90



36°-3000K-CRI90





DOTA series




- Maximum flexibility and adaptability: with its narrow beam optics, the DOTA recessed spot is proposed as an ideal solution for small scenarios such as shelves, corners or display cases.
- Compact size and black finishing with rim and rimless version.



DT05050F

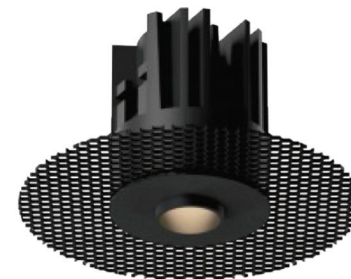


DT05050T

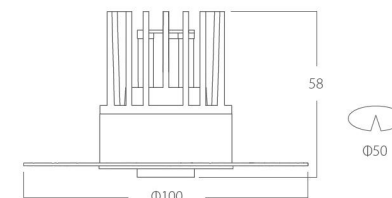

	DT05050F	DT05050T
Power	7W (420lm) / 9W (540lm)	7W (420lm) / 9W (540lm)
Beam Angle	15°	15°
CRI	RA>90	RA>90
Cut Out	D50mm	D50mm
Power Supply	36-40V / 7W (150mA) 36-40V / 9W (200mA)	36-40V / 7W (150mA) 36-40V / 9W (200mA)
IP Rated	IP20	IP20

Installation diagram

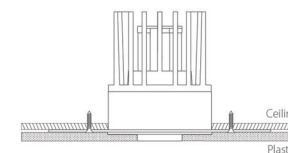

[CCT] 2700K 3000K 4000K




MINI downlight series




LYNX

Power	1.5W (62lm) / 3W (180lm)
Beam Angle	15D / 24D / 36D
CCT	2700K / 3000K / 4000K
CRI	RA>90
Cut Out	D38mm
IP Rated	IP20



LYNX OMNIZOOM


Power	3W (180lm)
Beam Angle	8D - 40D
CCT	2700K / 3000K / 4000K
CRI	RA>90
Cut Out	D38mm
IP Rated	IP20






LICO 5W - TRIMLESS

Power	5W (500lm)
Beam Angle	25D / 40D
CCT	2700K / 3000K / 4000K
CRI	RA>90
Cut Out	D37mm
Power Supply	500mA
IP Rated	IP20




LICO 5W

Power	5W (500lm)
Beam Angle	25D / 40D
CCT	2700K / 3000K / 4000K
CRI	RA>90
Cut Out	D35mm
Power Supply	500mA
IP Rated	IP20




MINI THEO

Power	3W (180lm)
Beam Angle	15D / 24D / 36D
CCT	2700K / 3000K / 4000K
CRI	RA>80
Cut Out	D25mm
IP Rated	IP20



MINI THALA


Power	3W (180lm)
Beam Angle	15D / 24D / 36D
CCT	2700K / 3000K / 4000K
CRI	RA>80
Cut Out	D25mm
IP Rated	IP20






ODIN 2W

Power 2W (228lm)
 Beam Angle 30D / 40D
 CCT 2700K / 3000K / 4000K
 CRI RA>90
 Power Supply 120mA
 Cut Out D30mm




ODIN 2W W

Power 2W (276lm)
 Beam Angle WW
 CCT 2700K / 3000K / 4000K
 CRI RA>90
 Power Supply 120mA
 Cut Out D30mm




ODIN 6W

Power 6W (513lm)
 Beam Angle 30D / 40D
 CCT 2700K / 3000K / 4000K
 CRI RA>90
 Power Supply 300mA
 Cut Out D30mm




ODIN 6W W

Power 6W (621lm)
 Beam Angle WW
 CCT 2700K / 3000K / 4000K
 CRI RA>90
 Power Supply 300mA
 Cut Out D30mm




ODIN 8W

Power 8W (570lm)
 Beam Angle 30D / 40D
 CCT 2700K / 3000K / 4000K
 CRI RA>90
 Power Supply 350mA
 Cut Out D30mm



ODIN 8W

Power 8W (690lm)
 Beam Angle WW
 CCT 2700K / 3000K / 4000K
 CRI RA>90
 Power Supply 350mA
 Cut Out D30mm



Accessories



HONEYCOMB



CLEARLENS



FROSTLENS

Accessories



HONEYCOMB



CLEARLENS




FROSTLENS




ODIN 2W SPOT

Power	2W (308lm)
Beam Angle	15D
CCT	2700K / 3000K / 4000K
CRI	RA>90
Power Supply	200mA
Cut Out	D30mm




ODIN 6W SPOT

Power	6W (533lm)
Beam Angle	15D
CCT	2700K / 3000K / 4000K
CRI	RA>90
Power Supply	500mA
Cut Out	D30mm



ODIN 8W SPOT

Power	8W (718lm)
Beam Angle	15D
CCT	2700K / 3000K / 4000K
CRI	RA>90
Power Supply	700mA
Cut Out	D30mm



Accessories



HONEYCOMB



CLEARLENS




FROSTLENS




ODIN 6W T - ADJUSTABLE

Power	6W (543lm)
Beam Angle	15D / 24D / 38D
CCT	2700K / 3000K / 4000K
CRI	RA>90
Power Supply	500mA
Cut Out	D30mm



ODIN 6W - TRIMLESS

Power	6W (532lm)
Beam Angle	30D / 40D
CCT	2700K / 3000K / 4000K
CRI	RA>90
Power Supply	300mA
Cut Out	D34mm



Accessories



HONEYCOMB




CLEARLENS



FROSTLENS


ARASH series

- Precise narrow beam angle in 24.
- Anti-glare construction allows visual comfort.

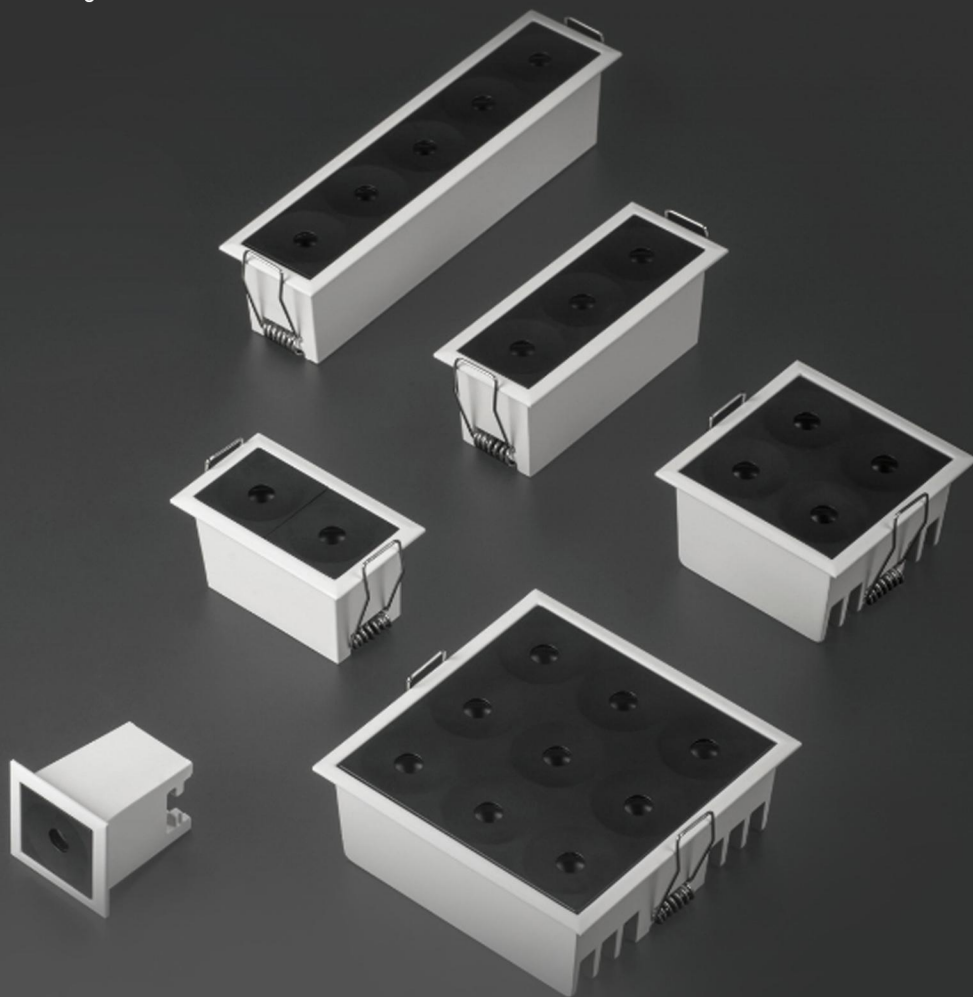


AR18035FS

Power	3W (150lm)
Beam Angle	24D
CRI	RA>90
Power Supply	3V / 700mA
Cut Out	35x35mm





AR18065FS

Power	5W (250lm)
Beam Angle	24D
CRI	RA>90
Power Supply	6V / 700mA
Cut Out	65x35mm



AR18095FS


Power	8W (400lm)
Beam Angle	24D
CRI	RA>90
Power Supply	9V / 700mA
Cut Out	95x35mm






AR18155FS

Power 18W (600lm)
 Beam Angle 24D
 CCT 2700K / 3000K / 4000K
 CRI RA>90
 Power Supply 15V / 700mA
 Cut Out 155x35mm




AR18065FST

Power 10W (500lm)
 Beam Angle 24D
 CCT 2700K / 3000K / 4000K
 CRI RA>90
 Power Supply 12V / 700mA
 Cut Out 65x65mm

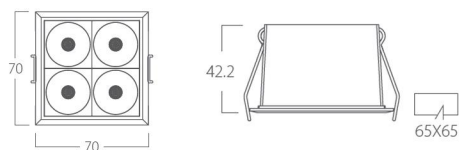


AR18095FST

Power 18W (900lm)
 Beam Angle 24D
 CCT 2700K / 3000K / 4000K
 CRI RA>90
 Power Supply 27V / 600mA
 Cut Out 95x95mm

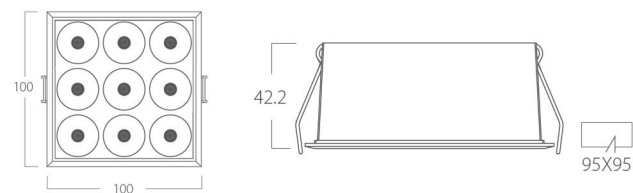


AR18035F

Power 3W (150lm)
 Beam Angle 24D
 CCT 2700K / 3000K / 4000K
 CRI RA>90
 Power Supply 3V / 700mA
 Cut Out D35mm

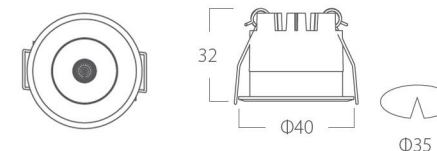


AR18055F

Power 8W (400lm)
 Beam Angle 24D
 CCT 2700K / 3000K / 4000K
 CRI RA>90
 Power Supply 6V / 700mA
 Cut Out D55mm


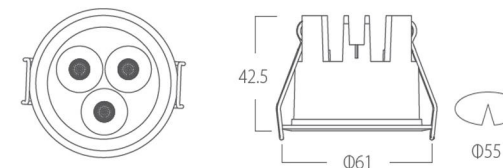


AR18075F

Power 15W (750lm)
 Beam Angle 24D
 CCT 2700K / 3000K / 4000K
 CRI RA>90
 Power Supply 21V / 600mA
 Cut Out D75mm


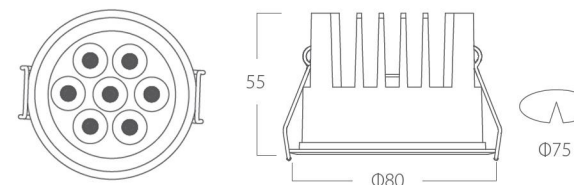


LASER BLADE series

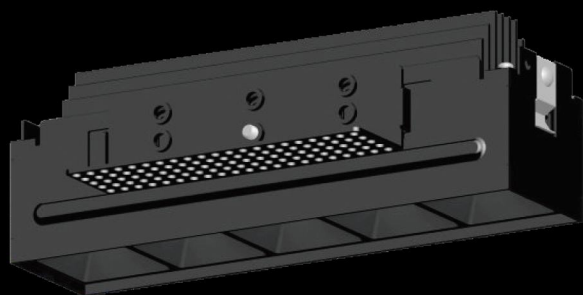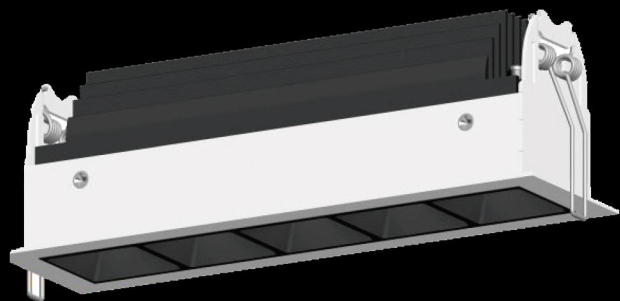


FURY 3W - FIX

Power	3W (135lm)
Beam Angle	10D / 30D / 50D
CCT	3000K / 3500K / 4000K
CRI	RA>90
Cut Out	43x40mm
IP Rated	IP20




FURY 3x3W - FIX

Power	3x3W (520lm)
Beam Angle	10D / 30D / 50D
CCT	3000K / 3500K / 4000K
CRI	RA>90
Cut Out	105x40mm
IP Rated	IP20



FURY 5x3W - FIX


Power	5x3W (900lm)
Beam Angle	10D / 30D / 50D
CCT	3000K / 3500K / 4000K
CRI	RA>90
Cut Out	167x40mm
IP Rated	IP20

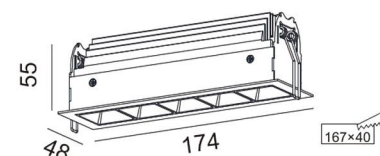




FURY 3x3W - ADJ

Power 3x3W (515lm)
 Beam Angle 10D / 30D / 50D
 CRI RA>90
 Cut Out 109x47mm
 IP Rated IP20




FURY 5x3W - ADJ

Power 5x3W (1908lm)
 Beam Angle 10D / 30D / 50D
 CRI RA>90
 Cut Out 327x47mm
 IP Rated IP20

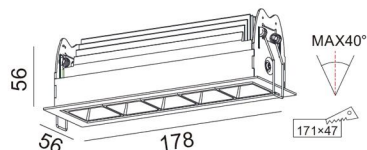


FURY 10x3W - ADJ

Power 10x3W (1908lm)
 Beam Angle 10D / 30D / 50D
 CRI RA>90
 Cut Out 327x47mm
 IP Rated IP20

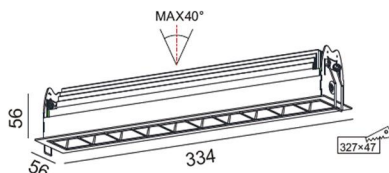

URSA 5x2W

Power 5x2W (1000lm)
 Beam Angle 15D / 30D / 45D
 CRI RA>90
 Cut Out 139x37mm
 IP Rated IP20

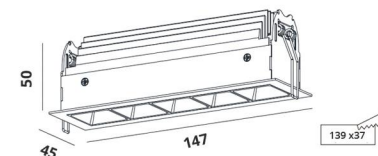

TUNABLE WHITE


2700K 4000K 5700K

	Power (Watt)	Luminous Flux (lm)	Dimension (mm)	Cutout (mm)
URSA 2W	2W	200lm	45x45x50	37x37
URSA 2x2W	2x2W	400lm	75x45x50	67x37
URSA 10x2W	10x2W	2000lm	279x45x50	272x37



FORNAX WALLWASHER

Beam Angle 120D
 CCT 2700K / 3000K / 4000K / 5700K
 Tuneable White 2700K~5700K
 CRI RA>90
 IP Rated IP20

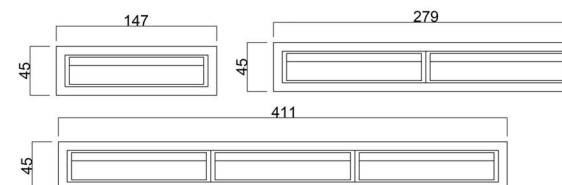

TUNABLE WHITE


2700K 4000K 5700K

	Power (Watt)	Luminous Flux (lm)	Dimension (mm)	Cutout (mm)
FORNAX 1.0	5x2W	1000lm	147x45x50	139x37
FORNAX 2.0	10x2W	2000lm	279x45x50	272x37
FORNAX 3.0	15x2W	3000lm	411x45x50	403x37



MEGA -S

Power 9W (900lm)
 Beam Angle 30D
 CRI RA>90
 Cut Out 64x64mm
 IP Rated IP20

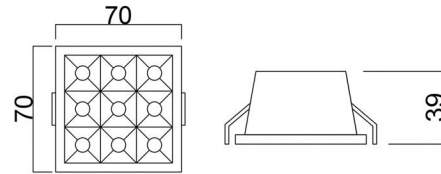


TUNABLE WHITE



CEILO 5x2W

Power 5x2W (1000lm)
 Beam Angle 15D / 30D / 45D
 CRI RA>90
 Cut Out 140x37x86mm
 IP Rated IP20




TUNABLE WHITE



MAGEL - TRIMLESS

Power 5x2W (1000lm) / 10x2W (2000lm)
 Beam Angle 15D / 30D / 45D
 CRI RA>90
 Cut Out 140x40mm / 273x40mm
 IP Rated IP20

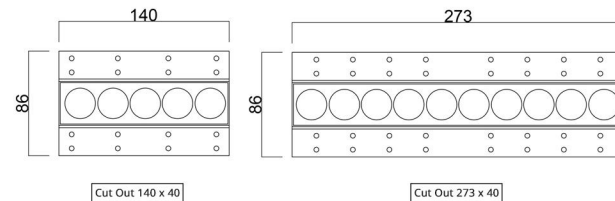


TUNABLE WHITE




CEILO 20x1W

Power 20x1W (2000lm)
 Beam Angle 15D / 30D / 45D
 CRI RA>90
 Cut Out 536x37x86mm
 IP Rated IP20

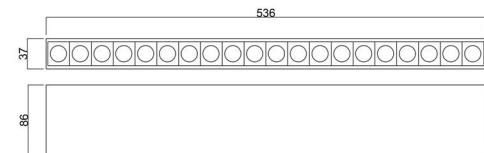


TUNABLE WHITE






FURY 3W - TRIMLESS

Power 3W (135lm)
 Beam Angle 10D / 30D / 50D
 CCT 3000K / 3500K / 4000K
 CRI RA>90
 Cut Out 38x46mm
 IP Rated IP20




HALO

Power 7W (700lm) / 12W (1200lm)
 Beam Angle 25D / 45D
 CCT 2700K / 3000K / 4000K
 CRI RA>90
 Product Size D90xH50 / D115xH36mm
 Cut Out D80mm / D105mm
 IP Rated IP20




FURY 2x3W - TRIMLESS

Power 2x3W (300lm)
 Beam Angle 10D / 30D / 50D
 CCT 3000K / 3500K / 4000K
 CRI RA>90
 Cut Out 69x46mm
 IP Rated IP20




HALO - TRIMLESS

Power 18W (1800lm) / 24W (2400lm)
 Beam Angle 25D / 45D
 CCT 2700K / 3000K / 4000K
 CRI RA>90
 Product Size D128xH36 / D172xH36mm
 Cut Out D120mm / D160mm
 IP Rated IP20



FURY 5x3W - TRIMLESS

Power 5x3W (900lm)
 Beam Angle 10D / 30D / 50D
 CCT 3000K / 3500K / 4000K
 CRI RA>90
 Cut Out 163x46mm
 IP Rated IP20



HALO - SURFACE

Power 7W (700lm) / 12W (1200lm)
 Beam Angle 25D / 45D
 CCT 2700K / 3000K / 4000K
 CRI RA>90
 Product Size D90xH50 / D115xH36mm
 Cut Out D80mm / D105mm
 IP Rated IP20

ARCTUS series




PRODUCT FEATURES

Adjustable spot light with soft and cosy lighting distribution.

High performance heat dissipator allows LED chip to work with a longer lifetime.

[CCT] 2700K 3000K 4000K





White Black



ARC08060A

Power 6W (390lm)
Beam Angle 24D / 36D
CRI RA>90
Power Supply 32-40V / 150mA
Cut Out D60mm




ARC08075A


Power 12W (780lm)
Beam Angle 15D / 24D / 36D
CRI RA>90
Power Supply 32-40V / 300mA
Cut Out D75mm



ARC08090A



Power 18W (1170lm)
Beam Angle 15D / 24D / 36D
CRI RA>90
Power Supply 32-40V / 450mA
Cut Out D90mm







ARC08060AS

Power 6W (390lm)
 Beam Angle 24D / 36D
 CRI RA>90
 Power Supply 32-40V / 150mA
 Cut Out 60x60mm





ARC08075AS

Power 12W (780lm)
 Beam Angle 15D / 24D / 36D
 CRI RA>90
 Power Supply 32-40V / 300mA
 Cut Out 75x75mm





ARC08090AS

Power 18W (1170lm)
 Beam Angle 15D / 24D / 36D
 CRI RA>90
 Power Supply 32-40V / 450mA
 Cut Out 90x90mm

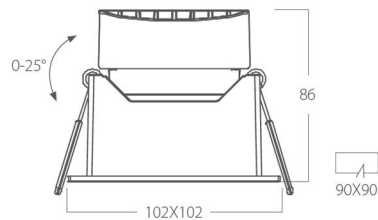



ARC08260AS

Power 2x6W (2x390lm)
 Beam Angle 24D / 36D
 CRI RA>90
 Power Supply 32-40V / 150mA
 Cut Out 130x60mm

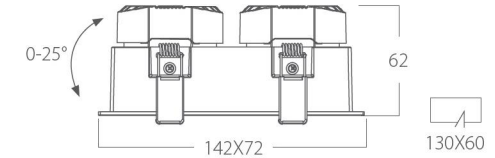


ARC08275AS

Power 2x12W (2x780lm)
 Beam Angle 15D / 24D / 36D
 CRI RA>90
 Power Supply 32-40V / 300mA
 Cut Out 160x75mm

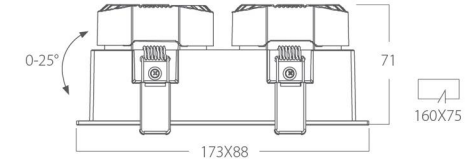

ARC08290AS

Power 2x18W (2x1170lm)
 Beam Angle 15D / 24D / 36D
 CRI RA>90
 Power Supply 32-40V / 450mA
 Cut Out 195x90mm

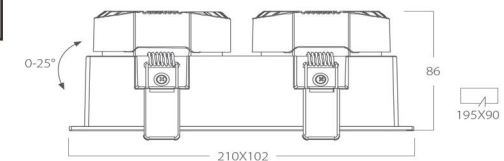


GIMBAL series




JADE

Power	10W (852lm) / 15W (1414lm)
Beam Angle	24D / 36D / 60D
CRI	RA>80
Cut Out	97x97mm
IP Rated	IP20



JADE 2.0


Power	2x10W (1734lm) / 2x15W (2868lm)
Beam Angle	24D / 36D / 60D
CRI	RA>80
Cut Out	183x97mm
IP Rated	IP20

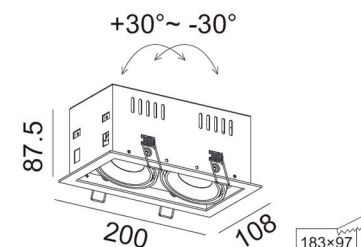



JADE TRIMLESS

Power 10W (852lm) / 15W (1414lm)
 Beam Angle 24D / 36D / 60D
 CRI RA>80
 Cut Out 97x97mm
 IP Rated IP20



Accessories



Honeycomb



Stripe glass




Woven glass



JADE 2.0 TRIMLESS

Power 2x15W (2675lm) / 2x18W (2975lm)
 Beam Angle 24D / 36D / 50D
 CRI RA>80
 Cut Out 187x96mm
 IP Rated IP20



Accessories



Honeycomb



Stripe glass



Woven glass




TONS DL-771

Optional lamp:

HD-77 (MD-C001)
 Wattage : 9W (700mA)
 Beam Angle : 12°, 24°, 38°



HD-77 (MD-D001)
 Wattage : 9.5W (450mA)
 Beam Angle : 15°, 24°, 36°



Accessories



Honeycomb



Stripe glass



Woven glass




TONS DL-772

Optional lamp:

HD-77 (MD-C001)
 Wattage : 9W (700mA)
 Beam Angle : 12°, 24°, 38°




HD-77 (MD-D001)
 Wattage : 9.5W (450mA)
 Beam Angle : 15°, 24°, 36°



Accessories



Honeycomb



Stripe glass



Woven glass


TANGO series



[CCT] 2700K 3000K 4000K



Optional Color




White

Black




TN7475F

Power 9W (675lm)
Beam Angle 90D
CRI RA>90
Power Supply 36-40V / 200mA
Cut Out D75mm




TN75105F

Power 15W (1125lm)
Beam Angle 90D
CRI RA>90
Power Supply 36-40V / 350mA
Cut Out D105mm



TN76125F

Power 25W (1875lm)
Beam Angle 90D
CRI RA>90
Power Supply 36-40V / 600mA
Cut Out D125mm



TONS DG-E series



Features

- Economic luminaire design with different lumen package to replace existed PLC down light from 1*18W to 2*26W.
- State-of-Art OSRAM LED technology provide better energy saving solution.
- Easy change driver to meet different lighting lumen applications.
- Deep Cut-off angle and 80 degree beam distribution provide good lighting effect and glaring control, UGR < 19.
- High-efficient Diffuser with special structure surface create very uniform light emitting surface.
- Front cover with clever click-in design offer customer the flexibility to fast change different color frame or frame size.
- With two modularize light-engine design, customer keep less stock but higher flexibility to meet different cut-out dimension 125, 150, 175, 200 even to 220mm.
- IP44 protection on the front provide the customer better solution in special installation application.
- Good thermal management ensure long life time span, 50,000 hours design spec.
- Two springs on the sides, very easy to replace the existed PLC down light.



Application

General lighting for residential and commercial application, especially good for high-end but budget oriented projects.





DG-E05A

Power	12W (1300lm)
	17W (1700lm)
Beam Angle	75D
CRI	RA>90
Power Supply	350mA / 500mA
Cut Out	D125mm

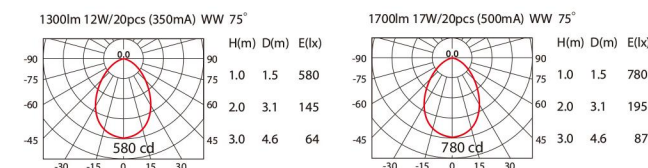

DG-E07A

Power	14W (1500lm)
	20W (2100lm)
	28W (2700lm)
Beam Angle	80D
CRI	RA>90
Power Supply	350mA / 500mA / 700mA
Cut Out	D175mm

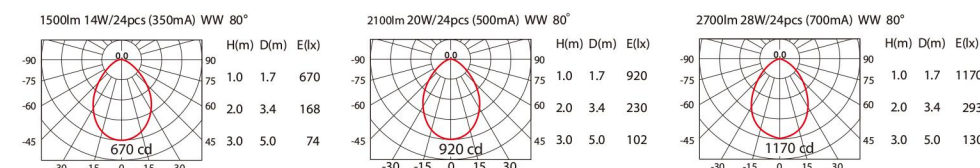



CEILING MOUNTED series





KHRONOS 12W-R

Power	12W
Beam Angle	15D / 30D / 45D
CCT	3000K / 4000K / 5000K
IP	IP20
Dimmable Opt.	TRIAC / 0-10V / DALI



KHRONOS 12W-S


Power	12W
Beam Angle	15D / 30D / 45D
CCT	3000K / 4000K / 5000K
IP	IP20
Dimmable Opt.	TRIAC / 0-10V / DALI






STUBE - ADJUSTABLE

Power 10W (615lm) / 15W (995lm)
 Beam Angle 25D / 40D / 50D
 CRI RA>80
 Cut Out Surface Mounted
 IP Rated IP20



10W




15W




STUBE SQ - FIXED

Power 10W (757lm) / 15W (895lm)
 Beam Angle 15D / 24D / 38D / 60D
 CRI RA>80
 Cut Out Surface Mounted
 IP Rated IP20



10W




15W




DOU-STUBE

Power 30W (2170lm)
 Beam Angle 15D / 30D / 45D
 CRI RA>90
 Cut Out Surface Mounted
 IP Rated IP20




GIO 7W - SURFACE

Power 7W (630lm)
 Beam Angle 15D / 24D / 36D
 CRI RA>90
 Cut Out Surface Mounted
 IP Rated IP20




GIO 10W - SURFACE

Power 10W (1000lm)
 Beam Angle 18D / 24D / 36D / 60D
 CRI RA>90
 Cut Out Surface Mounted
 IP Rated IP20



GIO 20W - RECESSED

Power 20W (1600lm)
 Beam Angle 15D / 23D / 38D / 45D / 60D
 CRI RA>90
 Cut Out D75mm
 IP Rated IP20






LILA series



- Product range: 15W/36W.
- Surface mounting.
- Precise beam angle: 12 / 23 / 38 / 50° .
- Optional black/white finishing.

Optional Color




White Grey Black

[CCT] 2700K
 3000K
 4000K

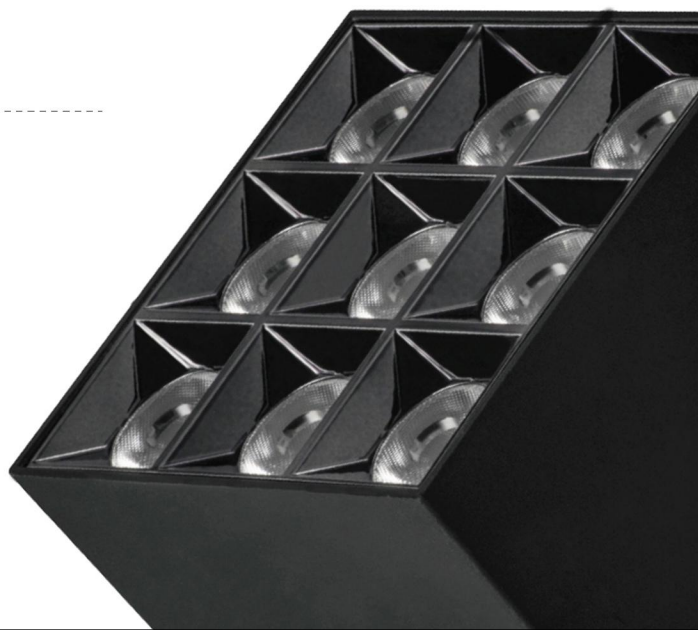


LILA 15W

Power	15W (975lm)
Beam Angle	12D / 23D / 38D / 50D
CRI	RA>90
Power Supply	36-40V / 350mA
IP	IP20

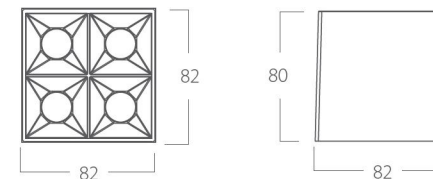

LILA 36W

Power	36W (2340lm)
Beam Angle	12D / 23D / 38D / 50D
CRI	RA>90
Power Supply	36-40V / 850mA
IP	IP20

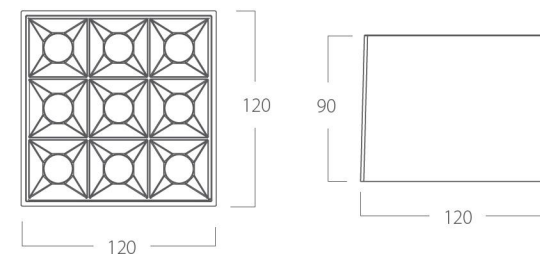


MYSTIC series

- Power range: 12W/2x12W/4x12W.
- Design: single/double/ quadruplet.
- Optional finishing: black/ white.





[CCT] 2700K 3000K 4000K




MY19105A

Power 12W (960lm)
Beam Angle 15D / 24D / 36D
CRI RA>90
Power Supply 36-40V / 300mA
Cut Out Surface Mounted




MY19205A

Power 2x12W (2x960lm)
Beam Angle 15D / 24D / 36D
CRI RA>90
Power Supply 36-40V / 2x300mA
Cut Out Surface Mounted





MY19225A

Power 4x12W (4x960lm)
Beam Angle 15D / 24D / 36D
CRI RA>90
Power Supply 36-40V / 4x300mA
Cut Out Surface Mounted




STELO series

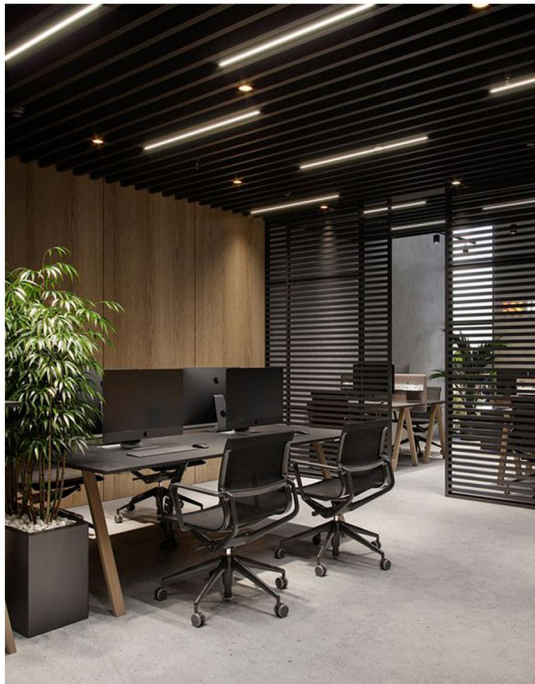


STELO-HC

Power	40W (L = 900mm) 50W (L = 1200mm) 60W (L = 1500mm) 72W (L = 1800mm)
Beam Angle CCT	120D 2700K / 3000K / 3500K / 4000K / 5000K Tuneable White
CRI	RA>90
Cut Out	Surface Mounted / Pendant
Dimmable Opt	On-Off / Dimmable



STELO-DF

Power	20W (L = 600mm) 30W (L = 900mm) 40W (L = 1200mm) 50W (L = 1500mm) 60W (L = 1800mm)
Beam Angle CCT	120D 2700K / 3000K / 3500K / 4000K / 5000K Tuneable White
CRI	RA>90
Cut Out	Surface Mounted / Pendant
Dimmable Opt	On-Off / Dimmable



NOLA ZOOM series

- Track light
- Surface Mounted
- Suspending
- Wall Mounted

NOLA ZOOM is a stylish and compact LED track light that will fit smoothly into any museum, gallery, and retail environments. Featuring an adjustable beam mechanism designed to provide endless beam options from a 25D narrow to a 60D wide flood distribution.

OPTICAL ACCESSORIES


Accessories

- | | | | |
|---|----------------|---|--------------|
|  | Honeycomb |  | Square |
|  | Circular Small |  | Rectangular |
|  | Circular Big |  | Wall Washing |



TUNABLE CCT

3000K 3500K 4000K 5000K 6000K

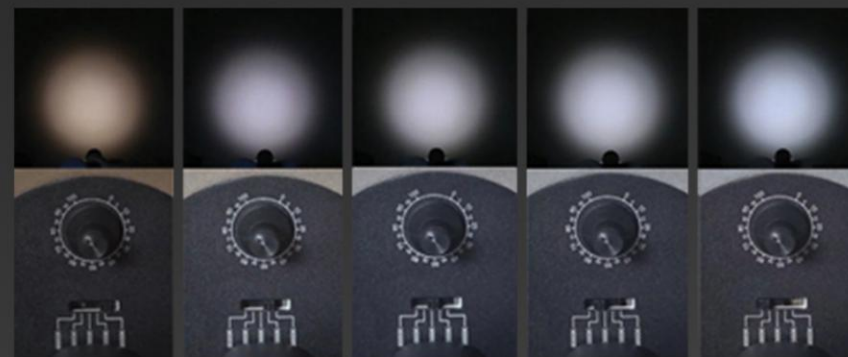

High Lumen efficiency
>90lm/W



Very reliable joint




Variety optical
accessories for choice




NOLA TR10 / TR15

Power	10W (824lm) / 15W (1072lm)
Beam Angle	15D-45D / 25D-60D
CRI	RA>90
Power Supply	220-240V, 50-60Hz
Cut Out	Wall Surface

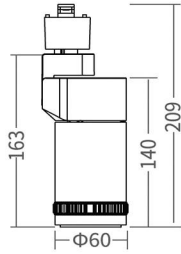

3-pin
track adaptor

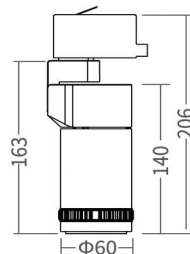

4-pin
track adaptor




NOLA WM10 / WM15

Power	10W (824lm) / 15W (1072lm)
Beam Angle	15D-45D / 25D-60D
CRI	RA>90
Power Supply	220-240V, 50-60Hz
Cut Out	Wall Surface




NOLA TR20 / TR25 / TR30

Power	20W (1865lm) / 25W (2009lm) / 30W (2275lm)
Beam Angle	15D-45D / 25D-60D
CRI	RA>90
Power Supply	220-240V, 50-60Hz
Cut Out	Wall Surface

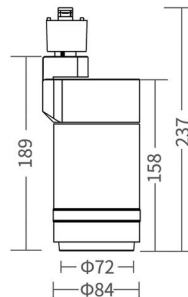

3-pin
track adaptor

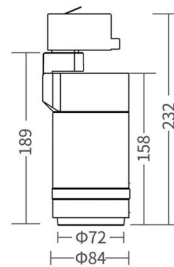


4-pin
track adaptor



NOLA WM20 / WM25 / WM30

Power	20W (1865lm) / 25W (2009lm) / 30W (2275lm)
Beam Angle	15D-45D / 25D-60D
CRI	RA>90
Power Supply	220-240V, 50-60Hz
Cut Out	Wall Surface



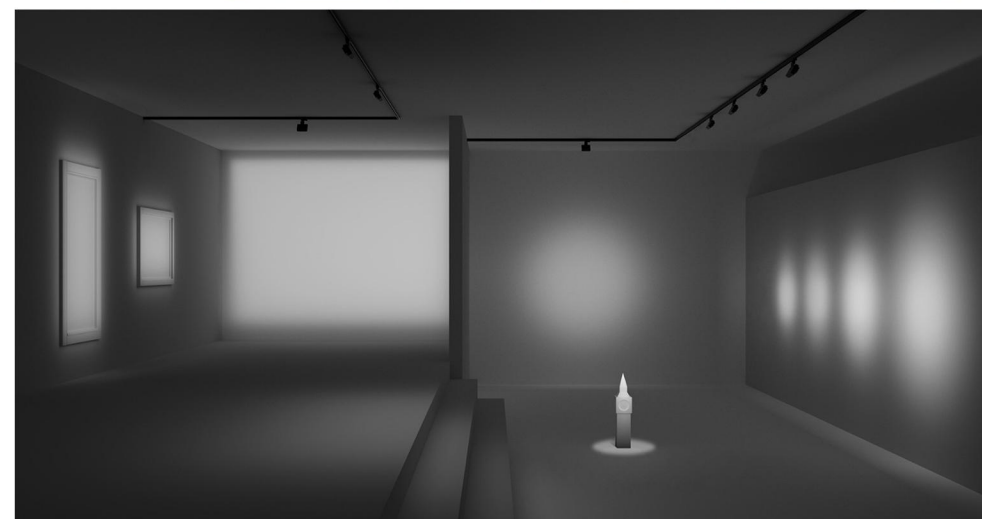

CUBE series



Light filter



Different light filters for different light effects

Magical Filters

In addition to the complete lighting solutions, Cube also allow various of spotlight, floodlight, and wall-washing light with 4 types of light filters. Infinite lighting creations, all by Cube.




Concealed 1-10V Control Gear

Different with other series, Cube owns a concealed 1-10V control gear which presents the minimalist aesthetic design concept and easy for adjustment of brightness.




CUBE 10W

Power 10W (750lm)
 Beam Angle 10D / 25D / 40D / 60D
 CRI RA>90
 Power Supply 220-240V, 50-60Hz
 Cut Out Track Light




CUBE 15W

Power 15W (1200lm)
 Beam Angle 10D / 25D / 40D / 60D
 CRI RA>90
 Power Supply 220-240V, 50-60Hz
 Cut Out Track Light



CUBE 25W

Power 25W (1800lm)
 Beam Angle 10D / 25D / 40D / 60D
 CRI RA>90
 Power Supply 220-240V, 50-60Hz
 Cut Out Track Light



OPTICAL ACCESSORIES



Honeycomb Louve
+Wall Washer



Wall Washer




Filter




SPORE 30W / 35W

Power 30W (2531m) /
 35W (2578lm)
 Beam Angle 10D / 15D / 30D / 60D / 80D /
 10*35D / 10*60D / 30*60D
 CRI RA>90
 Power Supply 220-240V, 50-60Hz
 Cut Out Track Light

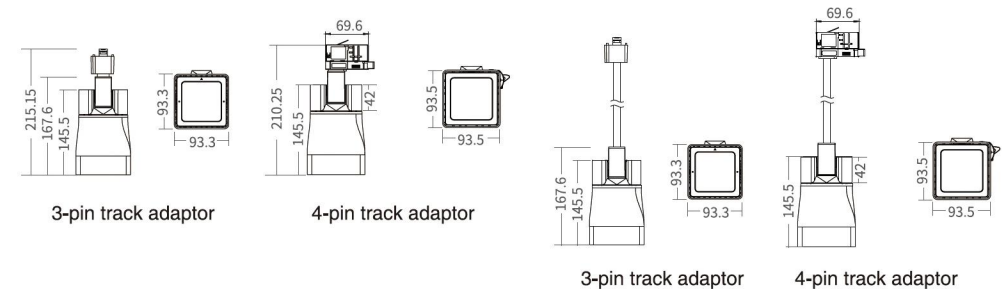


NORDIA series

Accessories

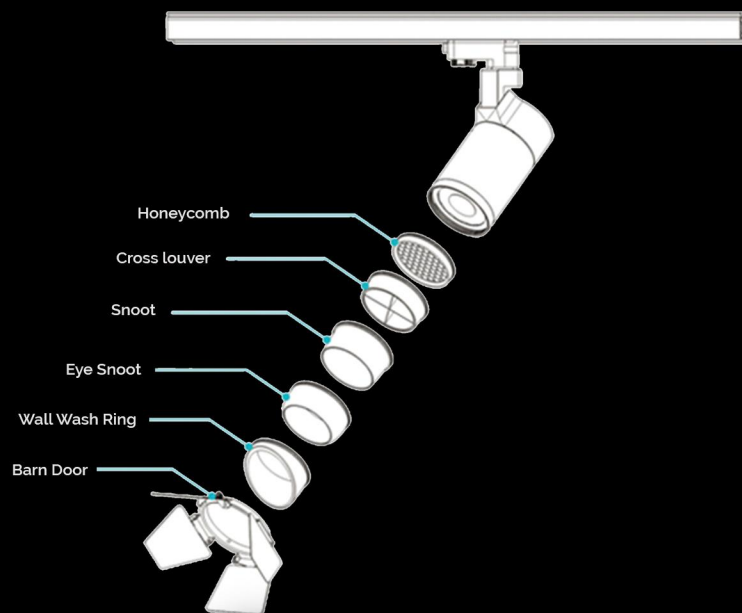

NORDIA TR10 / TR15

Power	10W (962m) / 15W (1385lm)
Beam Angle	15D / 18D / 24D / 38D
CRI	RA>90
Power Supply	36-40V / 250mA / 350mA
IP	IP20




3-pin track adaptor

4-pin track adaptor



NORDIA TR20 / TR30

Power	20W (2370m) / 30W (3079lm)
Beam Angle	15D / 18D / 24D / 38D
CRI	RA>90
Power Supply	36-40V / 520mA / 730mA
IP	IP20

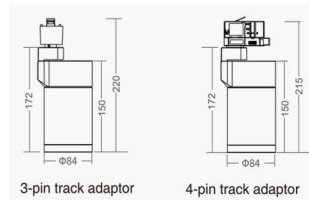


3-pin track adaptor

4-pin track adaptor




NORDIA AS10 / AS20

Power	10W (730m) / 20W (1675lm)
Beam Angle	25D*75D
CRI	RA>90
Power Supply	36-40V / 250mA / 500mA
IP	IP20

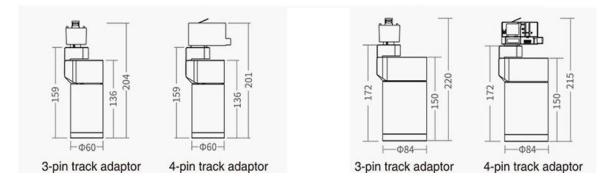

3-pin track adaptor

4-pin track adaptor



3-pin track adaptor

4-pin track adaptor



MAGTRACK

Magnetic Track Light series

Example 1
Perpendicular to the wall and
perpendicular to the ground.



Example 2
Parallel to the wall and
perpendicular to the ground.



Example 3
Parallel to the wall and
45D oriented.



LOW VOLTAGE tracklight

Made of die-cast aluminum and thermoplastic material. Opti beam interchanging reflectors with high luminous efficiency and uniform distribution.



FLEXIBLE INSTALLATION

Inclination of 90° on horizontal plane and 360° rotation around the vertical axis, with mechanical aiming lock.




HIGH CRI

LED versions with high color rendering index. High visual comfort.




RELIABLE

Branded component ensure the lighting have reliable quality.



235 mm




463 mm



691 mm




919 mm





MAGTRACK DOTLIGHT

Power	6W (720lm) / 12W (1440lm)
Beam Angle	24D
CRI	RA>90
Voltage	DC48V
IP Rated	IP20

6W




12W




MAGTRACK LINELIGHT

Power	10W (1200lm) / 12W (1440lm)
Beam Angle	110D
CRI	RA>90
Voltage	DC48V
IP Rated	IP20

10W




12W




EROS 6W

Power	6W (720lm)
Beam Angle	15D / 24D
CRI	RA>90
Voltage	DC48V
IP Rated	IP20



EROS 12W


Power	12W (1440lm)
Beam Angle	15D / 24D
CRI	RA>90
Voltage	DC48V
IP Rated	IP20

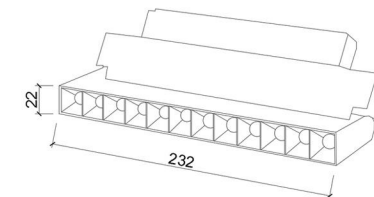




JARVIS 6W

Power 6W (500lm)
 Beam Angle 15D / 24D
 CRI RA>90
 Voltage DC48V
 IP Rated IP20




JARVIS 12W

Power 12W (1000lm)
 Beam Angle 15D / 24D
 CRI RA>90
 Voltage DC48V
 IP Rated IP20





GIO TR6W

Power 6W (720lm)
 Beam Angle 15D / 24D / 36D
 CRI RA>90
 Voltage DC48V
 IP Rated IP20




GIO TR8W


Power 8W (960lm)
 Beam Angle 15D / 24D / 36D
 CRI RA>90
 Voltage DC48V
 IP Rated IP20



GIO TR8W



Power 15W (1800lm)
 Beam Angle 15D / 24D / 36D
 CRI RA>90
 Voltage DC48V
 IP Rated IP20




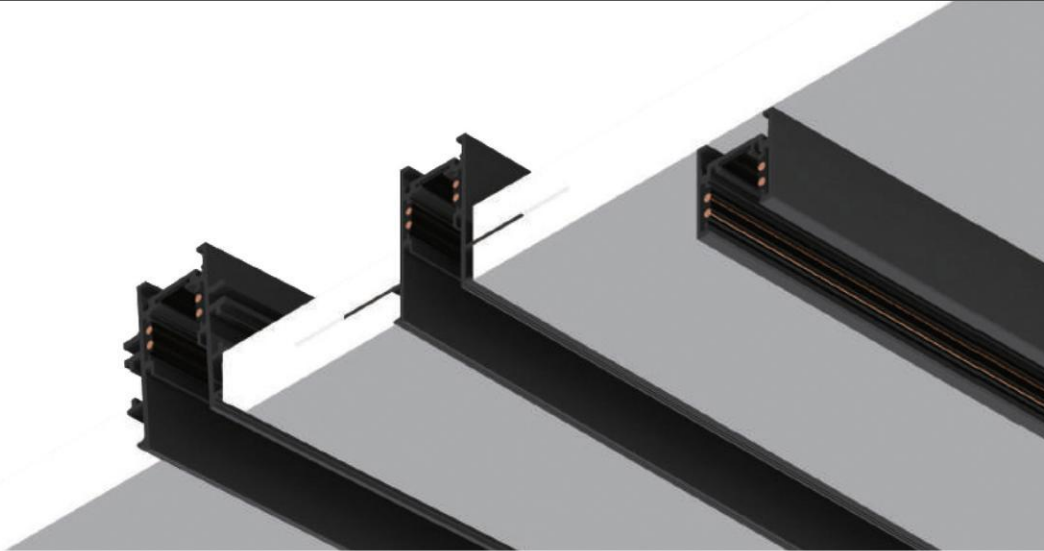


SURFACE MOUNTED TRACK


	Low Voltage	Length	Size
	Feeding	1000mm	L1000*W26*H53mm
	Coupler	1500mm	L1500*W26*H53mm
	Mounting	2000mm	L2000*W26*H53mm
	Accessories	3000mm	L3000*W26*H53mm




Magnet track main voltage track in extruded aluminum main voltage 10-48V.
Electrical wiring is located in an extrude PVC insulated housing.
The track is supplied with a series of accessories which will successfully resolve almost all types of lighting installation requirements.
And also has the facility for direct surface mounting through knockouts at 500m spacing.

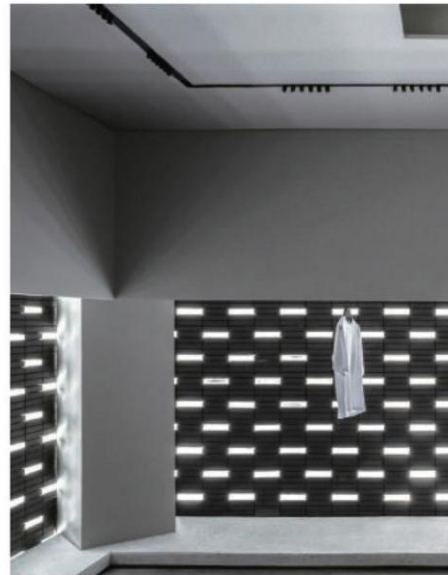


T- connector - R



End-cap



Pendent Kits



Flexible Connector

Magnet track main voltage track in extruded aluminum main voltage 10-48V.
Electrical wiring is located in an extrude PVC insulated housing.
The track is supplied with a series of accessories which will successfully resolve almost all types of lighting installation requirements. And also has the facility for direct surface mounting through knockouts at 500m spacing.



FOOD



FASHION






SHOP




AUTOMOBILE

TRIMLESS TRACK


	Low Voltage	Length	Size
	Feeding	1000mm	L1000*W72*H53mm
	Coupler	1500mm	L1500*W72*H53mm
	Mounting	2000mm	L2000*W72*H53mm
	Accessories	3000mm	L3000*W72*H53mm




T- connector - R



End-cap



Pendent Kits






Flexible Connector


Magnet track main voltage track in extruded aluminum main voltage 10-48V.
 Electrical wiring is located in an extrude PVC insulated housing.
 The track is supplied with a series of accessories which will successfully resolve almost all types of lighting installation requirements. And also has the facility for direct surface mounting through knockouts at 500m spacing.

TRIMLESS TRACK


	Low Voltage	Length	Size
	Feeding	1000mm	L1000*W65*H47mm
	Coupler	1500mm	L1500*W65*H47mm
	Mounting	2000mm	L2000*W65*H47mm
	Accessories	3000mm	L3000*W65*H47mm




T- connector - R



End-cap



Pendent Kits



Flexible Connector

Magnet track main voltage track in extruded aluminum main voltage 10-48V.
 Electrical wiring is located in an extrude PVC insulated housing.
 The track is supplied with a series of accessories which will successfully resolve almost all types of lighting installation requirements. And also has the facility for direct surface mounting through knockouts at 500m spacing.

LINEAR LUMINAIRES

series



Cover:

- Clear cover
- Frosted
- Milky



FLUX LINEAR

Power	6W (DC24V) 14.4W (DC24V)
Beam Angle	120D
CCT	3000K / 3500K / 4000K / 5000K / Tuneable White
IP Rated	IP20 / IP65

Housing:

- Aluminium U Channel
- Aluminium 45°
- Aluminium Recessed
- Aluminium Deep Recessed
- Aluminium Thick Acrylic



FLUX LINEAR UNDERWATER

Power	5W (DC24V) 14W (DC24V)
Beam Angle	120D
CCT	3000K / 4000K / 5000K / RGB
IP Rated	IP68 Chlor Resistant
Dimmable Opt.	On-Off / DMX

Cover:

- Clear cover
- Frosted
- Milky



Housing:

- Aluminium Deep Recessed
- Aluminium Thick Acrylic




FLUX LINEAR COB

Power	10W (90-120lm) 18W (80-105lm)
Beam Angle	170D
CCT	2700K-6500K
CRI	RA>90
IP Rated	IP20 / IP65



NEON FLEX LINEAR

Power	12W (DC24V)
Beam Angle	120D
CCT	3000K / 4000K / 5000K / RGB / Tuneable White
IP Rated	IP67
Dimmable Opt.	On-Off / TRIAC / 0-10V / DMX

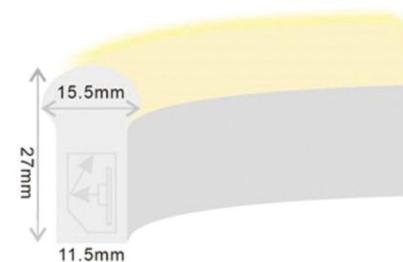


FLUX LINEAR COB RGB


Power	9W (R: 30lm G: 90lm B:12lm) 15W (R: 30lm G: 90lm B:12lm)
Beam Angle	170D
CCT	RGB
CRI	/
IP Rated	IP20 / IP65



ALUMINIUM U CHANNEL




Material : Alumunium, Anodized
 Cover : Clear, Milky, Frosted
 Length : 1m - 2m



ALUMINIUM RECESSED




Material : Alumunium, Anodized
 Cover : Clear, Milky, Frosted
 Length : 1m - 2m




ALUMINIUM 45D




Material : Alumunium, Anodized
 Cover : Clear, Milky, Frosted
 Length : 1m - 2m




ALUMINIUM THICK



Material : Alumunium, Anodized
 Cover : Clear, Milky, Frosted
 Length : 1m - 2m



ALUMINIUM DEEP RECESSED



Material : Alumunium, Anodized
 Cover : Clear, Milky, Frosted
 Length : 1m - 2m

